

Series MU1



AVENTICS™ Series MU1



Pressure regulator, Series MU1-RGS

- G 1/2
- Qn = 5000 l/min
- Standard pressure regulator
- Activation Mechanical
- suitable for ATEX



Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0.5 ... 30 bar
Ambient temperature min./max.	-10 ... 80 °C
Medium temperature min./max.	-10 ... 80 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	See table below
Pressure supply	single
Activation	Mechanical
Weight	1.2 kg

Technical data

Part No.		Port	Flow	Adjustment range min./max.	Pressure gauge
			Qn		
R412004371		G 1/2	5000 l/min	0.5 ... 16 bar	with pressure gauge
R412007578		G 1/2	5000 l/min	0.5 ... 16 bar	-
9153320160		G 1/2	5000 l/min	0.5 ... 10 bar	-

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting: panel installation or mounting bracket R412004872


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Die cast zinc
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

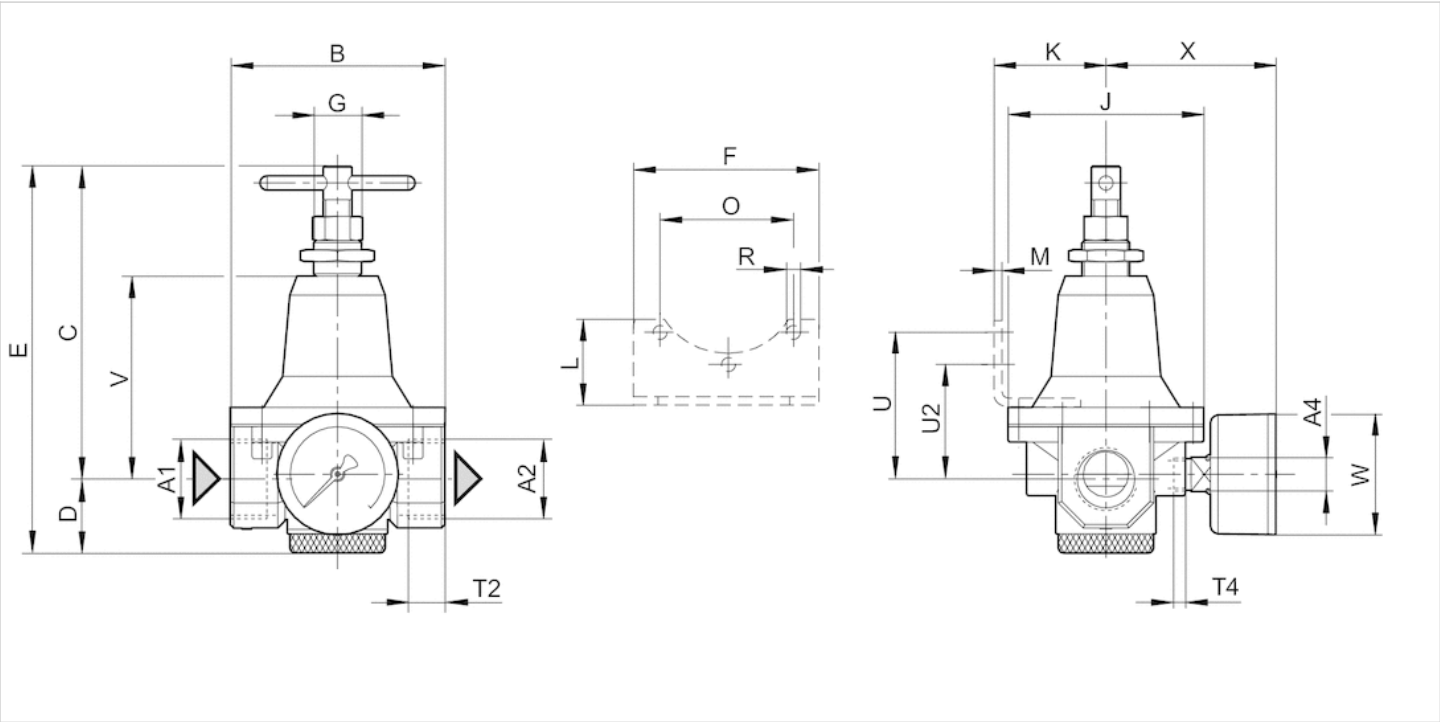


Dimensions

A1	A2	A4	B	C	D	E	F	G	J	K	L	M	O	R	U	U2	T2	T4	V	W	X
G 1/2	G 1/2	G 1/4	82	129	31	162	124	M20x1,5	82	47	38	3	53.6	6	58	45	14	7	83	63	72

Diagrams


Pressure characteristics curve

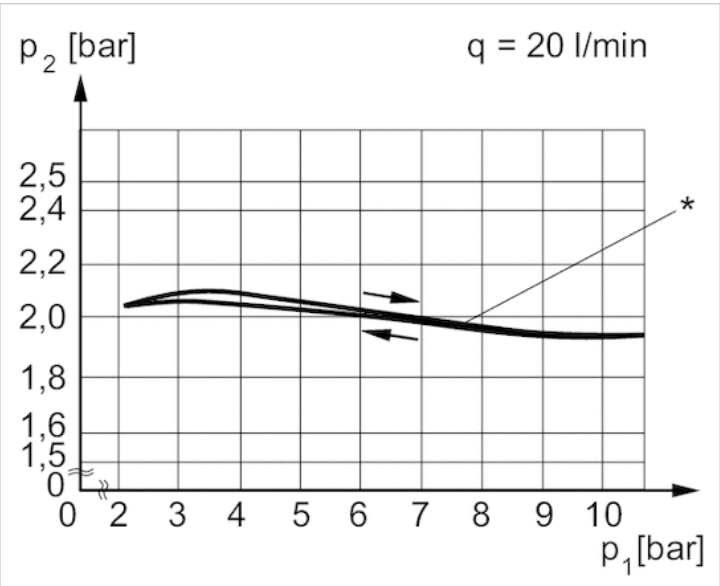

p1 = working pressure
p2 = secondary pressure

q = flow rate
* starting point


Flow rate characteristic (secondary range p₂: 0.5 - 10 bar)

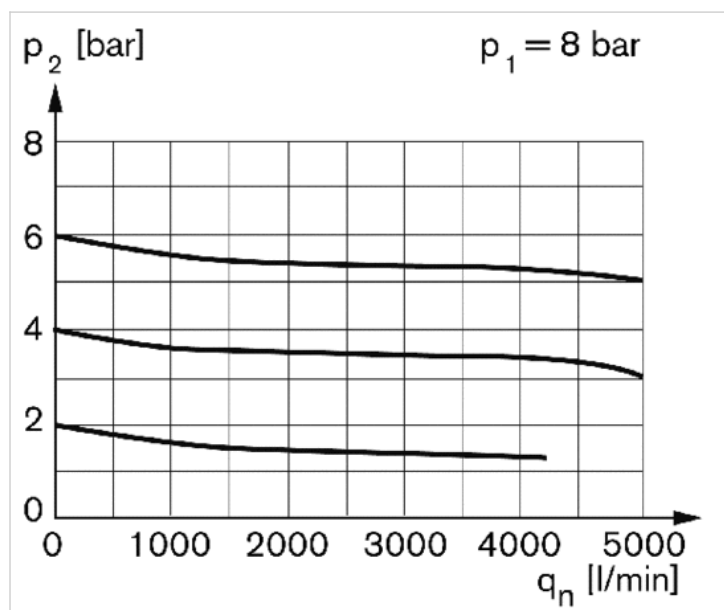

p₁ = Working pressure
p₂ = Secondary pressure
q_n = Nominal flow

Pressure regulator, Series MU1-RGS

- G 1
- Qn = 5000 l/min
- Standard pressure regulator
- Activation Mechanical
- suitable for ATEX

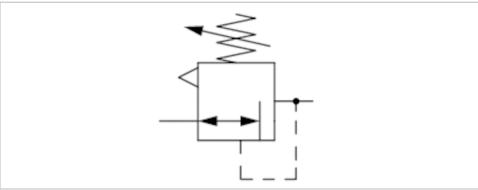

Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0.5 ... 25 bar
Ambient temperature min./max.	-10 ... 80 °C
Medium temperature min./max.	-10 ... 80 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 ... 10 bar
Pressure supply	single
Activation	Mechanical
Weight	1.2 kg

Technical data

Part No.	Port	Flow
		Qn
R412006574	G 1	5000 l/min

Nominal flow Qn with secondary pressure 6 bar at Δp = 1 bar, Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting: panel installation or mounting bracket R412004872


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

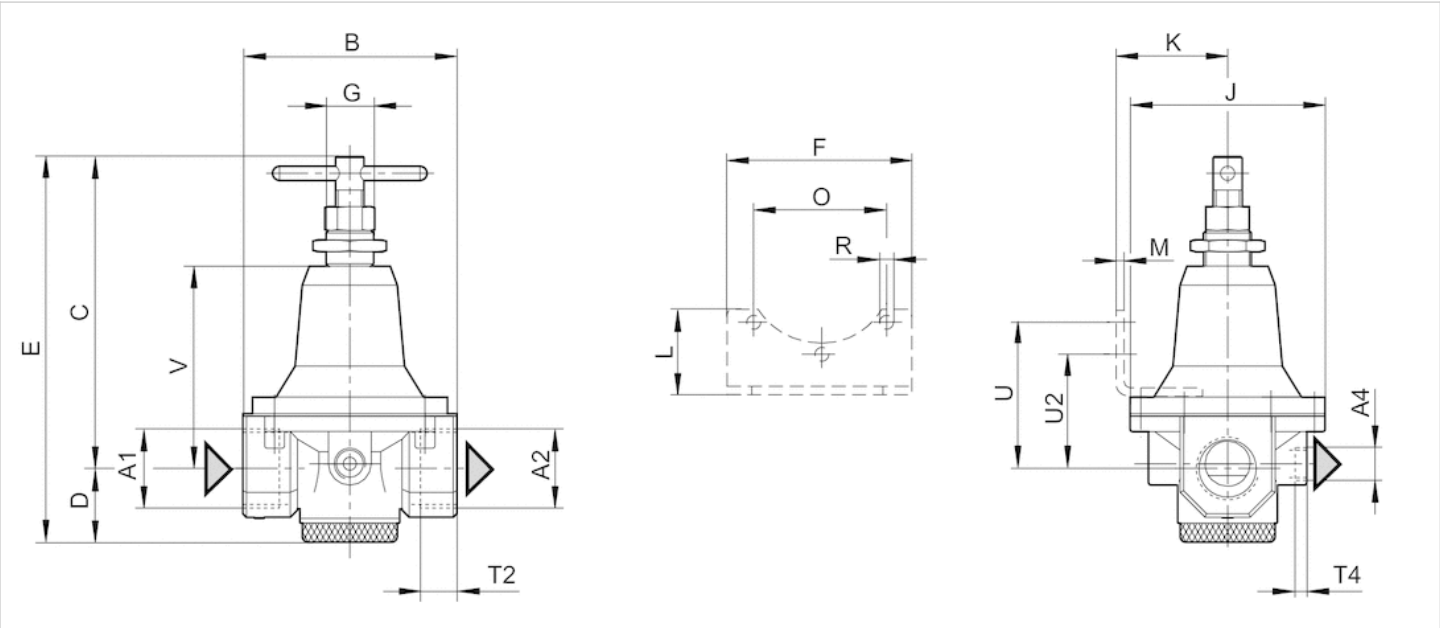


Dimensions

A1	A2	A4	B ±5	C ±5	D ±5	E ±7	F	G	J ±5	K	L	M	O	R	T2	T4	U	U2	V
G 1	G 1	G 1/4	90	131	31	162	124	M20x1,5	82	47	38	3	53.3	5.5	18	7	60.1	47.1	83


Diagrams

Pressure characteristics curve

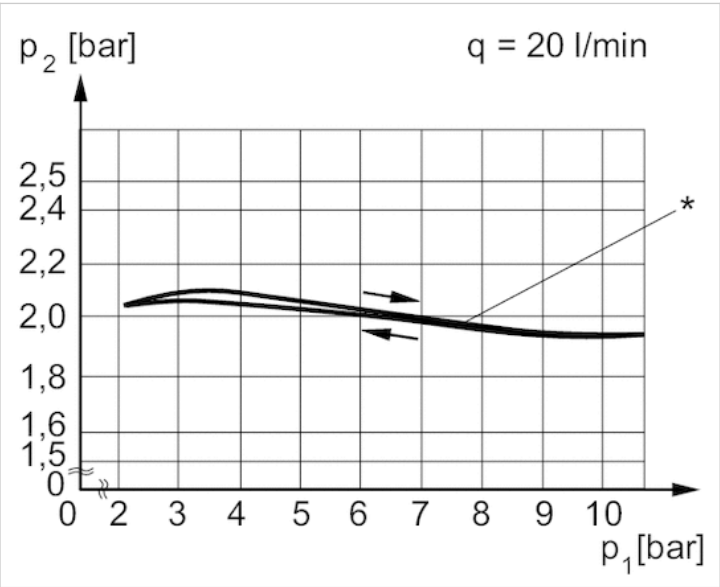

p1 = working pressure
 p2 = secondary pressure
 q = flow rate
 * starting point


Flow rate characteristic (secondary range p2: 0.5 - 10 bar)

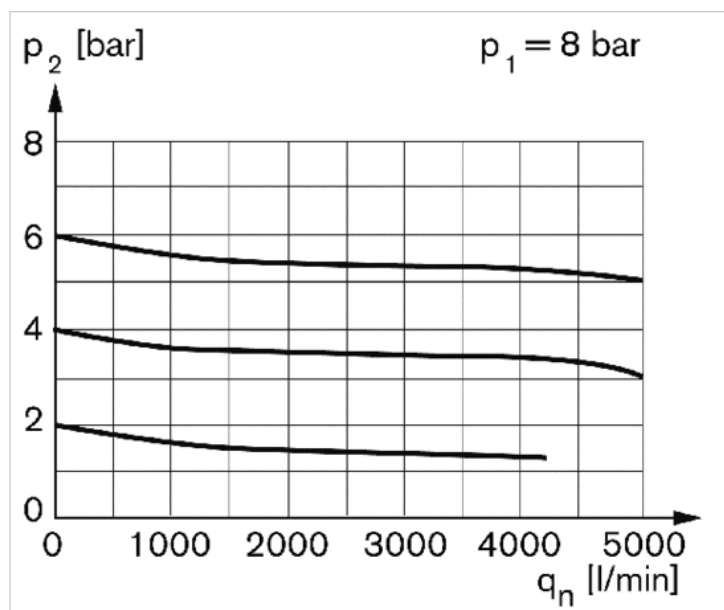

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Pressure regulator, Series MU1-RGS

- G 1 1/4 G 1 1/2
- Qn = 15000 l/min
- Standard pressure regulator
- Activation Mechanical
- suitable for ATEX

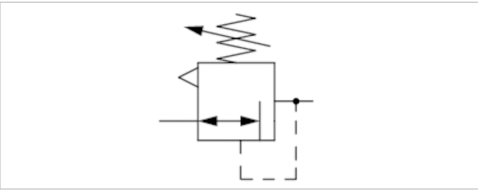

Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0.5 ... 25 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 ... 10 bar
Pressure supply	single
Activation	Mechanical
Weight	2.5 kg

Technical data

Part No.	Port	Flow
		Qn
R412006575	G 1 1/4	15000 l/min
R402000233	G 1 1/2	15000 l/min

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

mounting: mounting bracket R412004873 or installation in piping


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

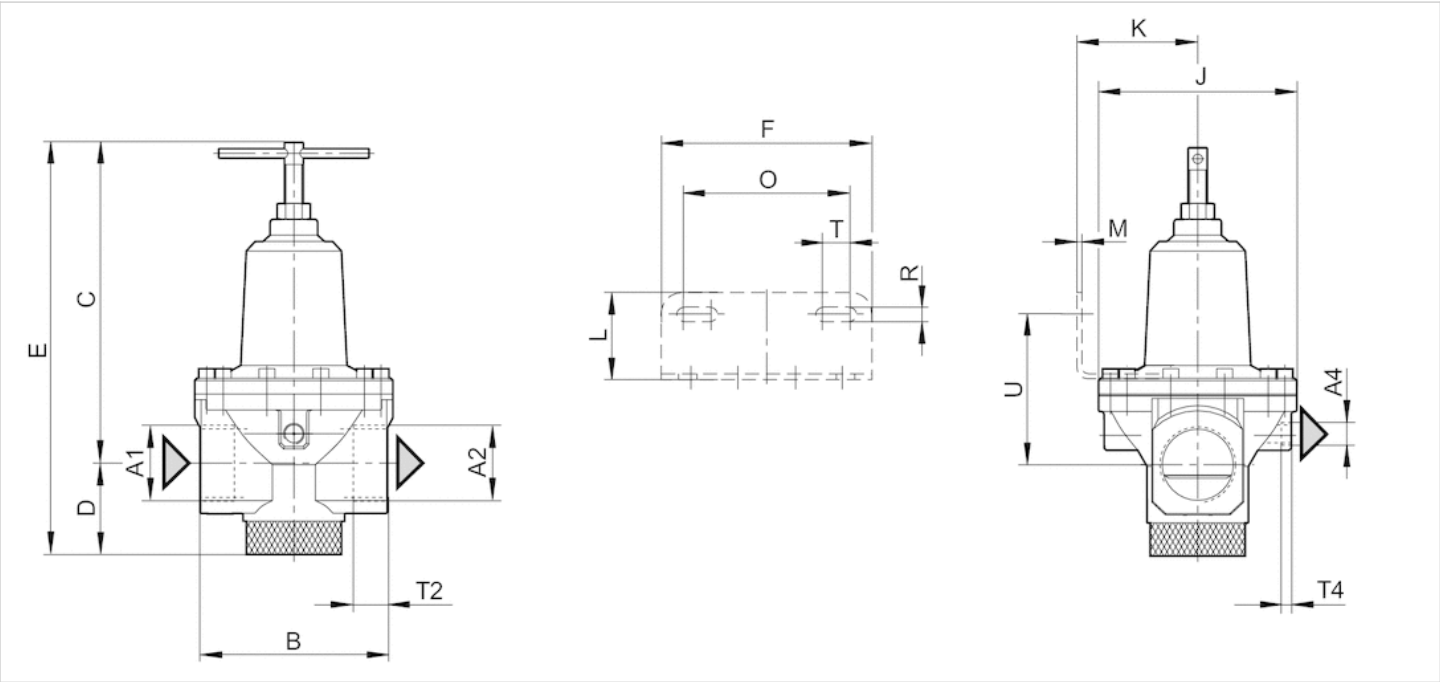


Dimensions

A1	A2	A4	B ±5	C ±5	D ±5	E ±7	F	J ±7	K	L	M	O	R	T	T2	T4	U
G 1 1/4	G 1 1/4	G 1/4	118.5	202.5	57.5	260	124	125	75	51	3	98	8.4	16	24	9	92.5
G 1 1/2	G 1 1/2	G 1/4	118.5	202.5	57.5	260	124	125	75	51	3	98	8.4	16	24	9	92.5

Diagrams


Pressure characteristics curve

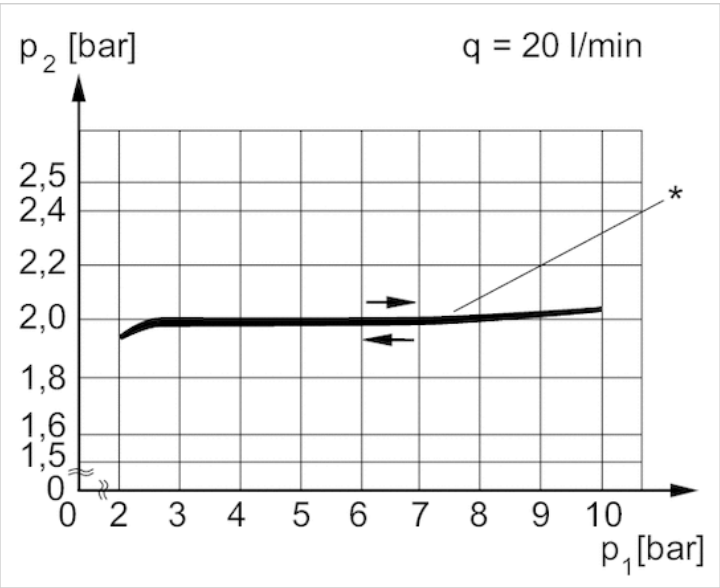

p1 = working pressure
 p2 = secondary pressure

q = flow rate
* starting point

Flow rate characteristic (secondary range p₂: 0.5 - 10 bar)

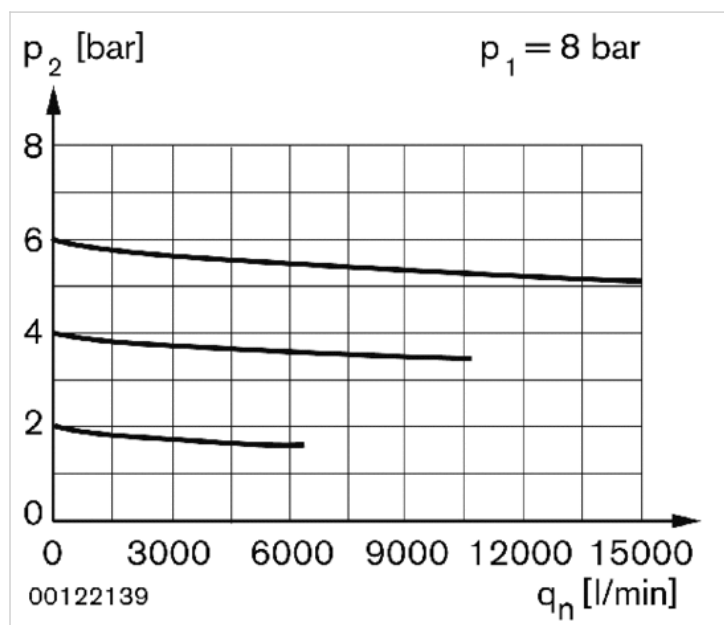


p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Pressure regulator, Series MU1-RGS

- G 1/4
- Qn = 1000 l/min
- Standard pressure regulator
- Activation Mechanical
- with pressure gauge
- Free of substances that impair surface wetting in the coating process, p1 max = 35 bar, p2 max = 23 bar



Parts	Pressure regulator
Mounting orientation	Any
Working pressure min./max.	0.5 ... 35 bar
Ambient temperature min./max.	0 ... 60 °C
Medium temperature min./max.	0 ... 60 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 ... 23 bar
Pressure supply	single
Activation	Mechanical
Weight	0.63 kg

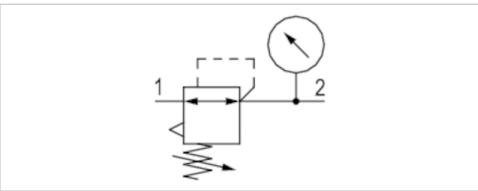

Technical data

Part No.	Port	Flow	Pressure gauge
		Qn	
R412010111	G 1/4	1000 l/min	with pressure gauge

Nominal flow Qn with secondary pressure 6 bar at Δp = 1 bar

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting: panel installation or mounting bracket


Delivery incl. mounting bracket R412010110 and pressure gauge R412007898

Technical information

Material	
Housing	Steel
Seals	Nitrile rubber


Dimensions

Dimensions

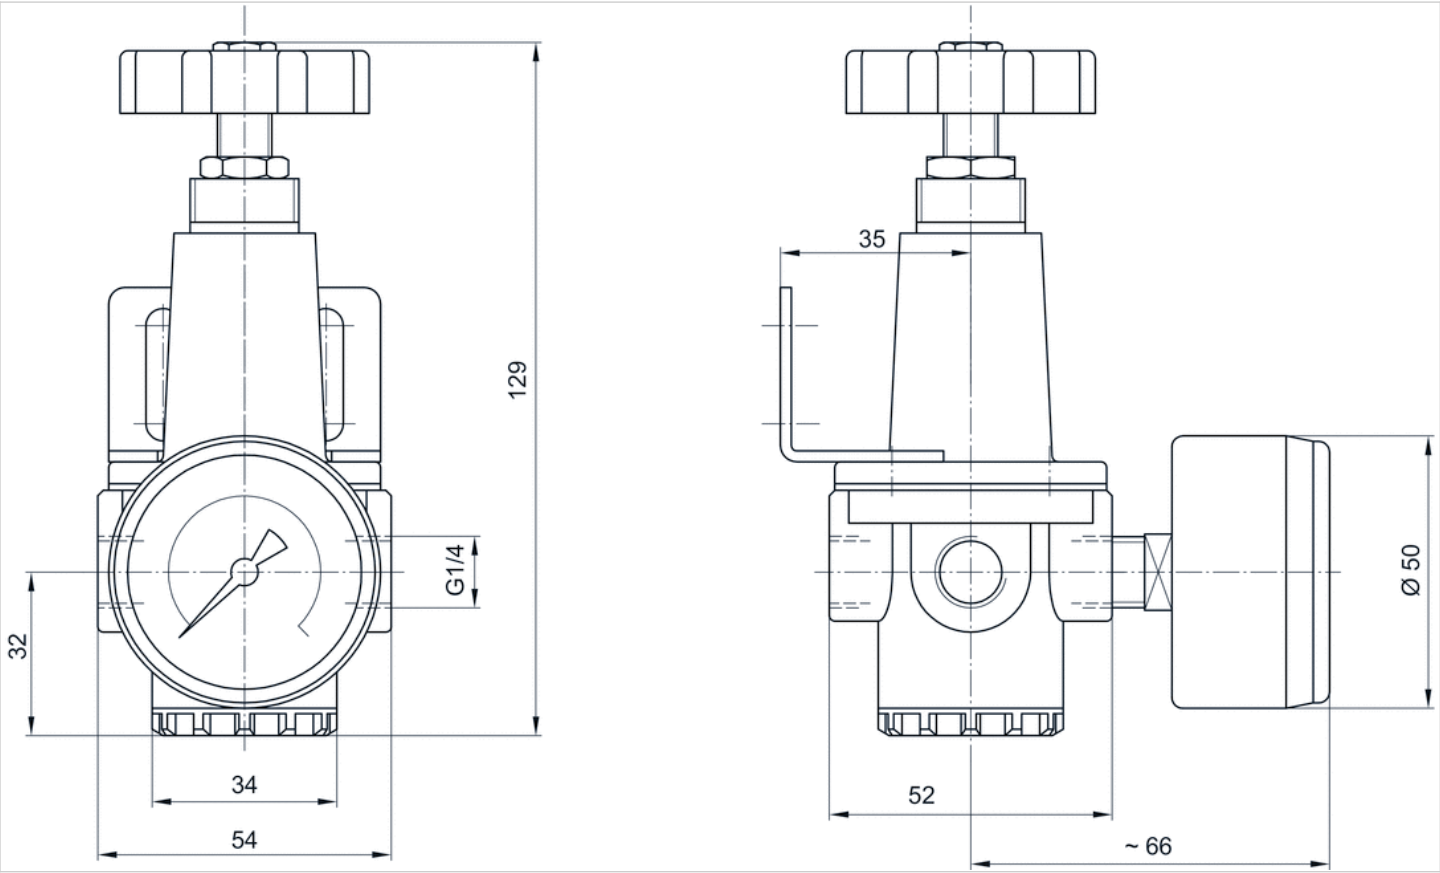


Diagrams

Flow rate characteristic

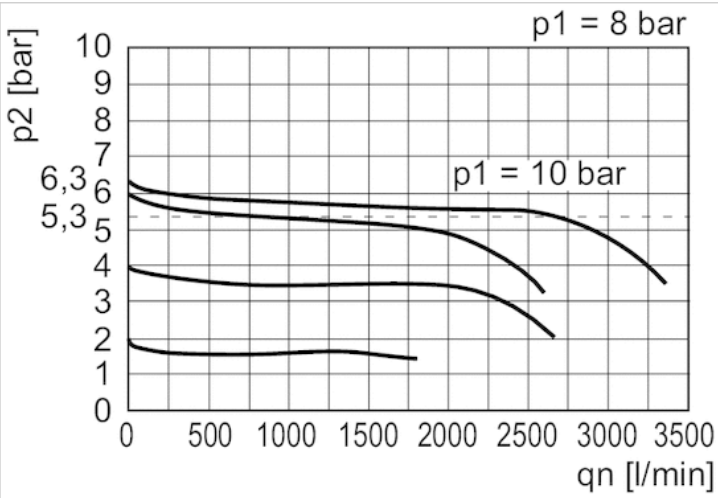

p1 = Working pressure
 p2 = Secondary pressure
 qn = Nominal flow


Pressure characteristics curve

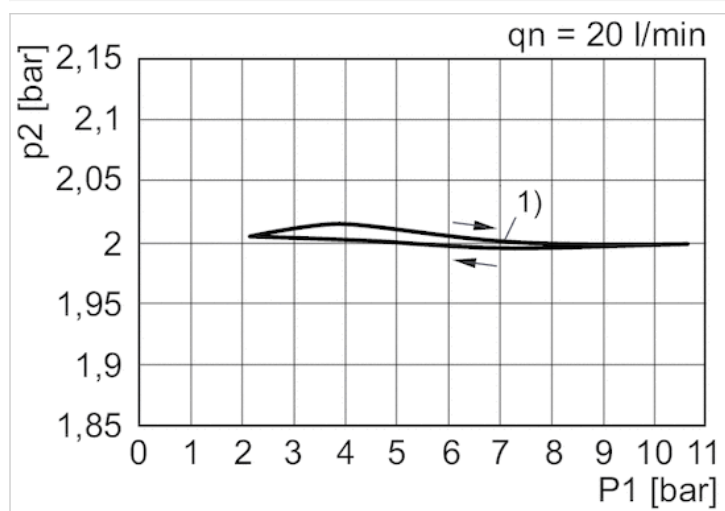

p1 = Working pressure
p2 = Secondary pressure
qn = Nominal flow
1) Starting point

Pressure regulator, Series MU1-RGS

- G 3/4 G 1 G 1 1/2
- $Q_n = 15000-31500$ l/min
- Standard pressure regulator
- Activation pneumatically
- suitable for ATEX

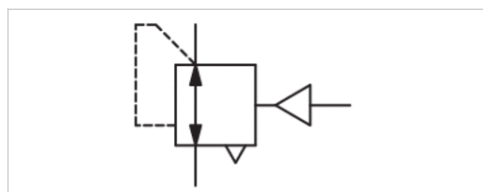

Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0.5 ... 40 bar
Control pressure min./max.	0.5 ... 20 bar
Ambient temperature min./max.	-10 ... 80 °C
Medium temperature min./max.	-10 ... 80 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 ... 20 bar
Pressure supply	single
Activation	pneumatically
Weight	2 kg

Technical data

Part No.	Port	Flow	Fig.
		Q_n	
R412007600	G 3/4	15000 l/min	Fig. 1
R976750953	G 1	15000 l/min	Fig. 1
R412006577	G 1 1/2	31500 l/min	Fig. 2

Nominal flow Q_n with secondary pressure $p_2 = 6$ bar at $\Delta p = 1$ bar, Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

mounting: mounting bracket R412004873 or installation in piping


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Zinc Die-cast aluminum
Seals	Nitrile rubber Acrylonitrile butadiene rubber

Dimensions

Dimensions

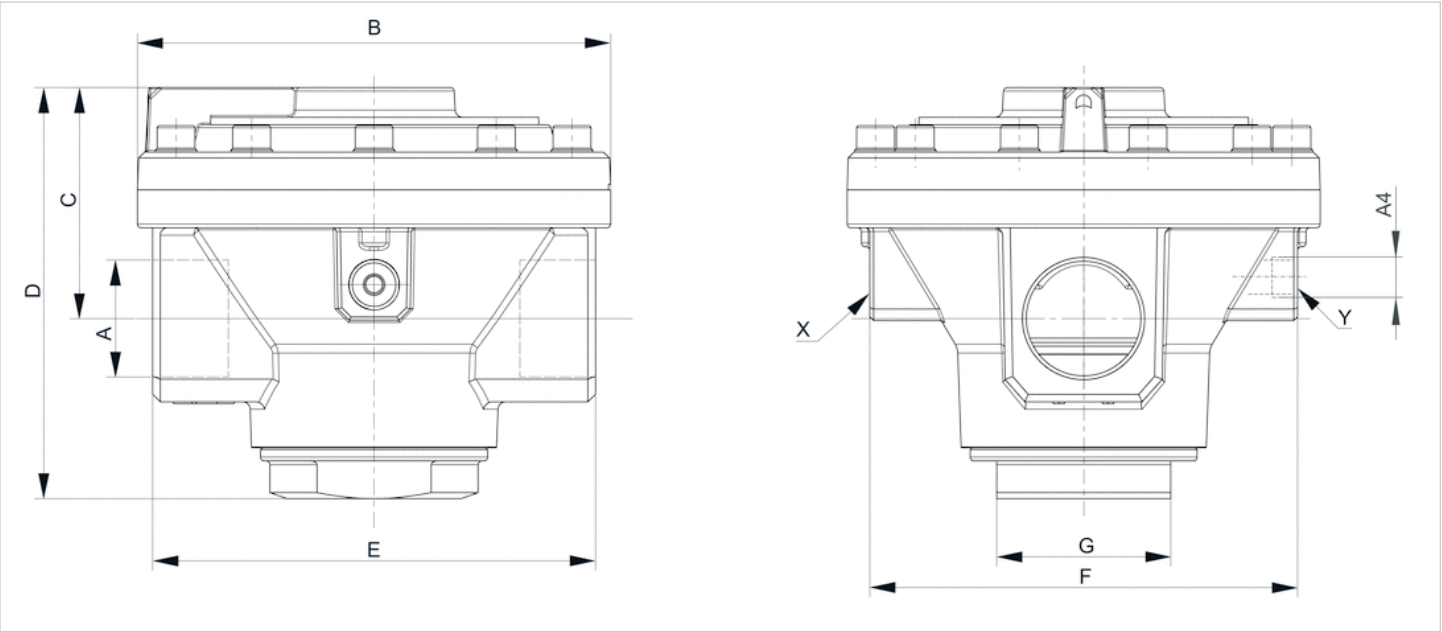


Dimensions in mm

A1	A4	B ±7	C ±5	D ±7	E ±5	F ±7	G	Pressure gauge hole closed
G 3/4	G 1/4	125	61	109	117	113	SW46	XY
G 1	G 1/4	125	61	109	117	113	SW46	X
G 1 1/2	G 1/4	125	74.5	127	118.5	118	SW41	X


Diagrams

Pressure characteristics curve, Fig. 1

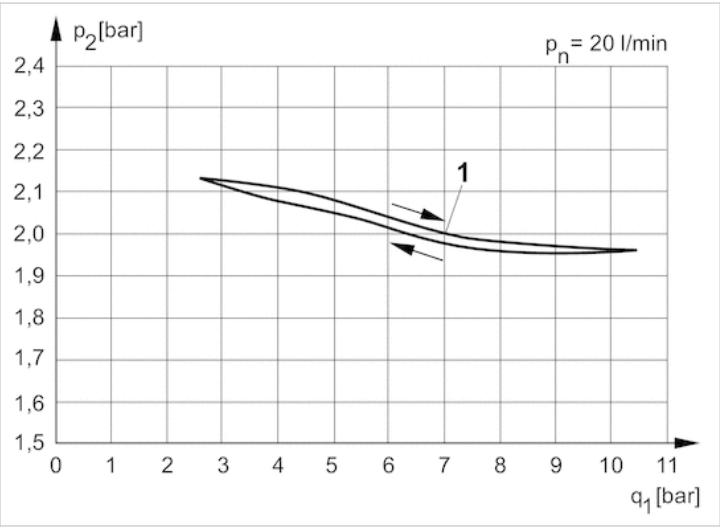


p1 = working pressure, p2 = secondary pressure, q = flow rate
 1) = Starting point

Flow rate characteristic, Fig. 1

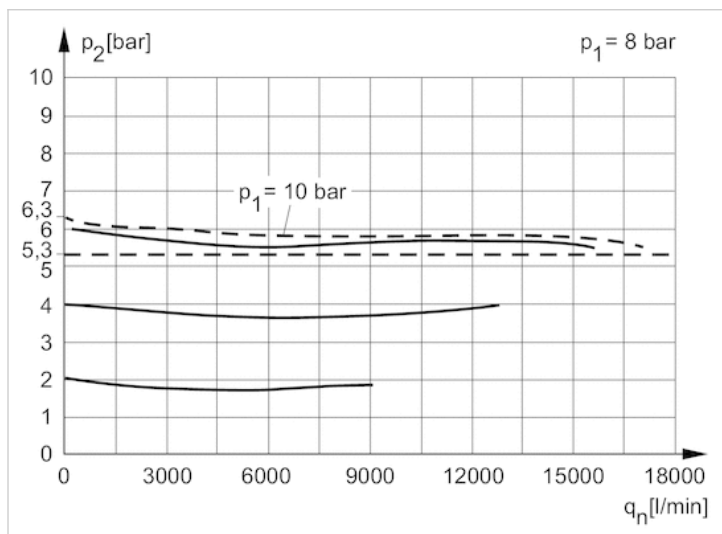


p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Pressure characteristics curve, Fig. 2

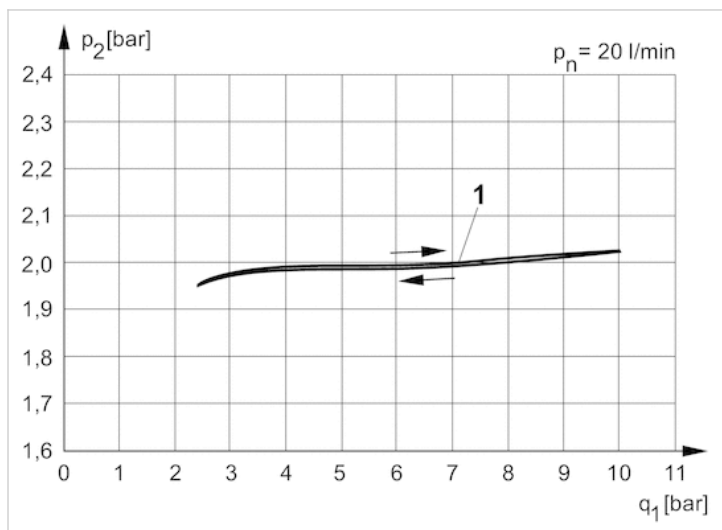

p_1 = working pressure, p_2 = secondary pressure, q = flow rate
 1) = Starting point

Flow rate characteristic, Fig. 2

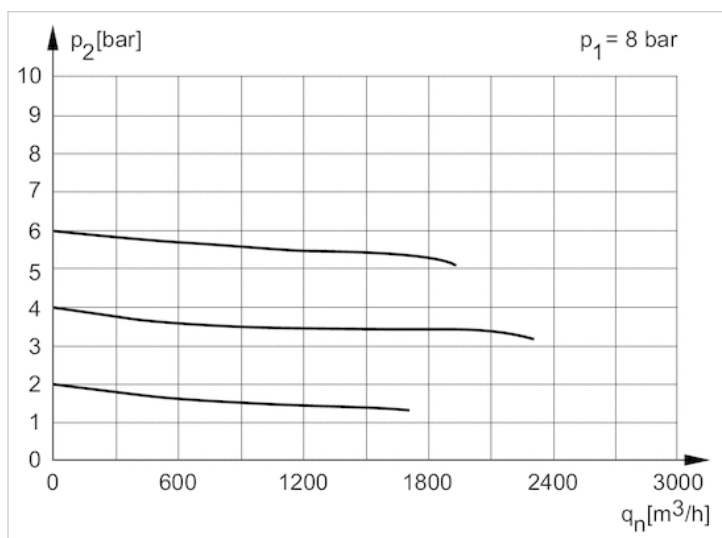


p_1 = Working pressure

p_2 = Secondary pressure

q_n = Nominal flow

Circuit diagram

Application example

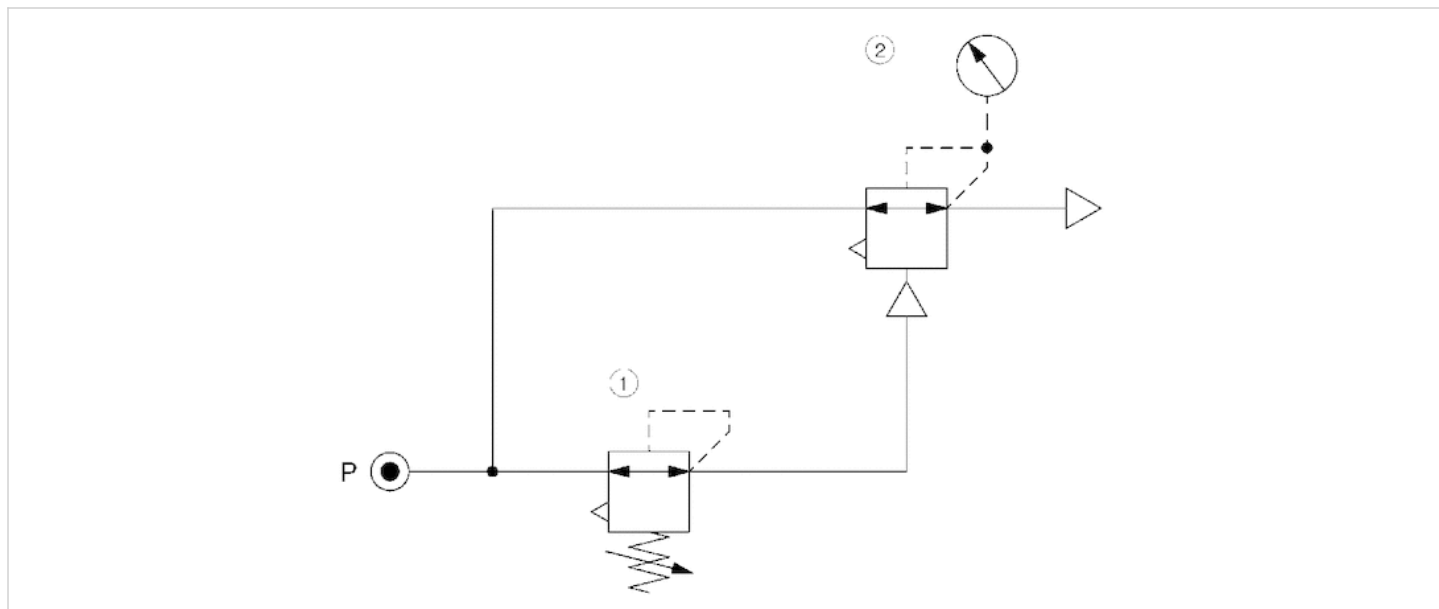


1) precision pressure regulator

2) pressure regulator valve, pneumatically operated

Pressure regulator, Series MU1-RGS

- G 2
- Qn = 50000 l/min
- Standard pressure regulator
- Activation pneumatically
- suitable for ATEX

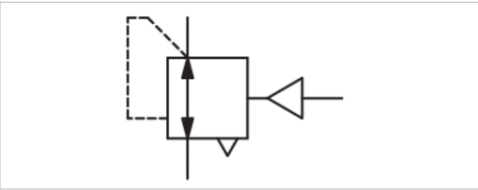

Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0.5 ... 25 bar
Control pressure min./max.	16 bar
Ambient temperature min./max.	-10 ... 80 °C
Medium temperature min./max.	-10 ... 80 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 ... 16 bar
Pressure supply	single
Activation	pneumatically
Weight	4.68 kg

Technical data

Part No.	Port	Flow
		Qn
R412006578	G 2	50000 l/min

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar, Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting type: for installing in piping


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

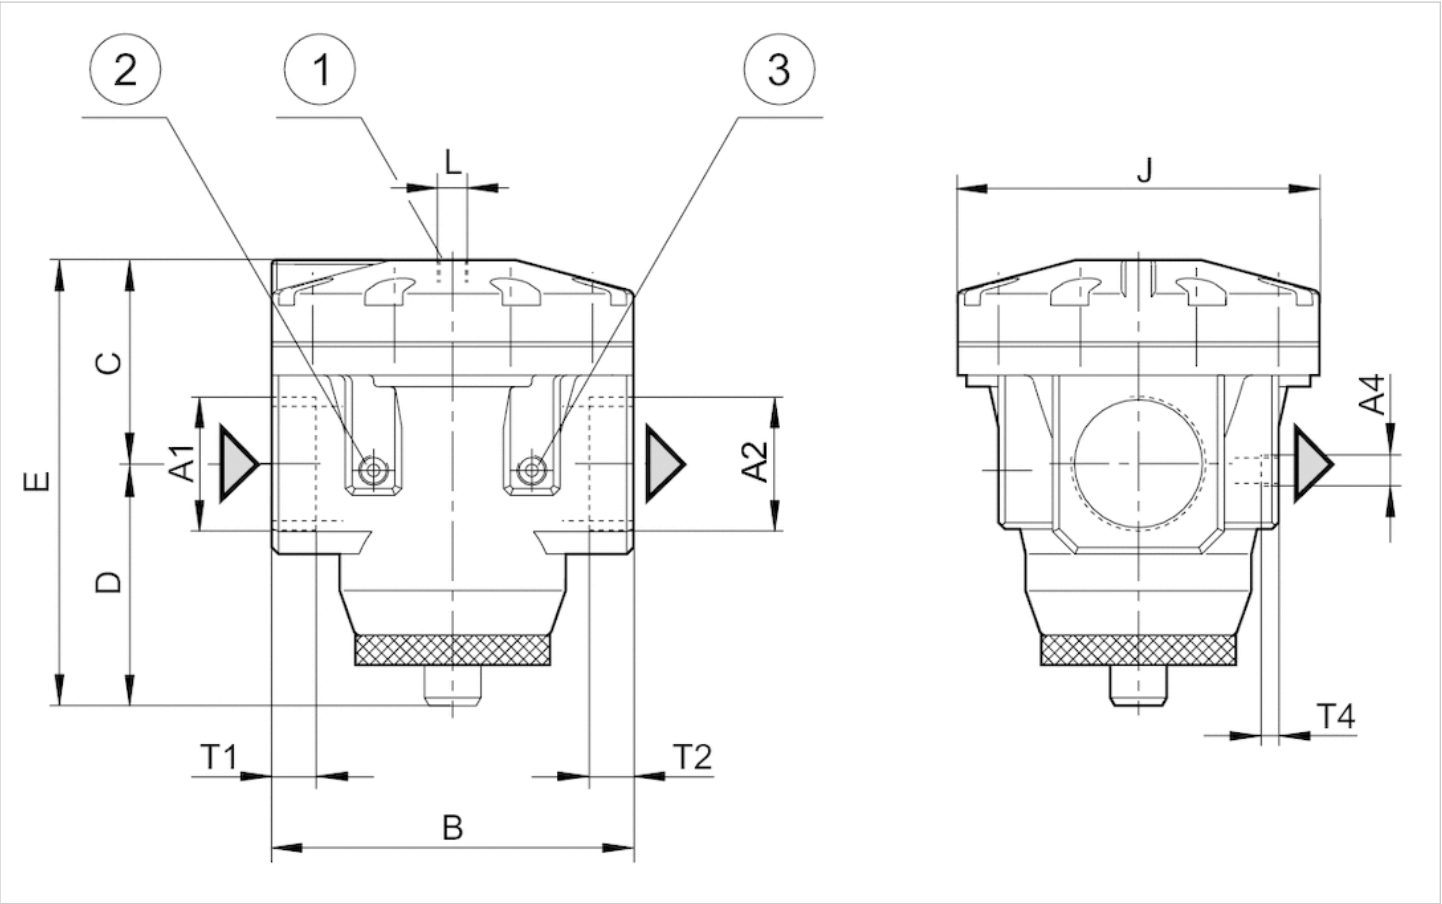


- 1) Pilot connection
- 2) Pressure gauge connection P1
- 3) Pressure gauge connection P2

Dimensions

A1	A2	A4	B ±5	C ±5	D ±5	E ±7	J ±5	L	T1	T2	T4
G 2	G2	G 1/4	160	90	107	197	160	G 1/4	30	30	9.5


Diagrams

Pressure characteristics curve

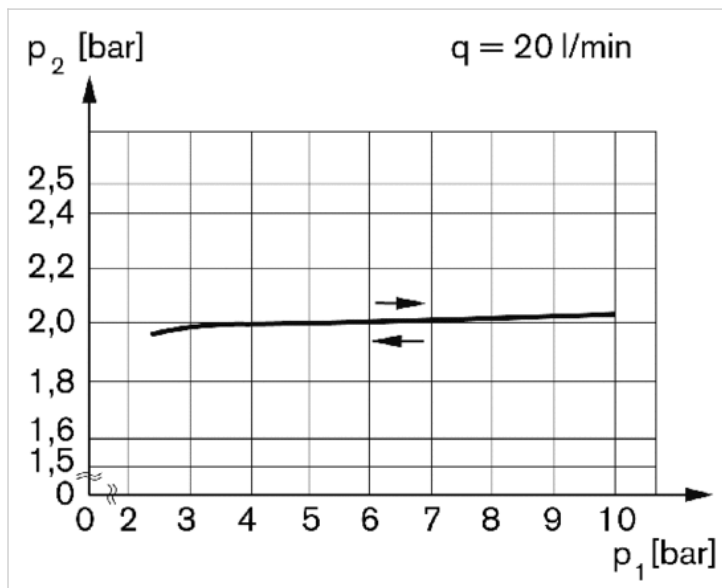

p_1 = working pressure
 p_2 = secondary pressure
 q = flow rate
 * starting point


Flow rate characteristic (secondary range p_2 : 0.5 - 10 bar)

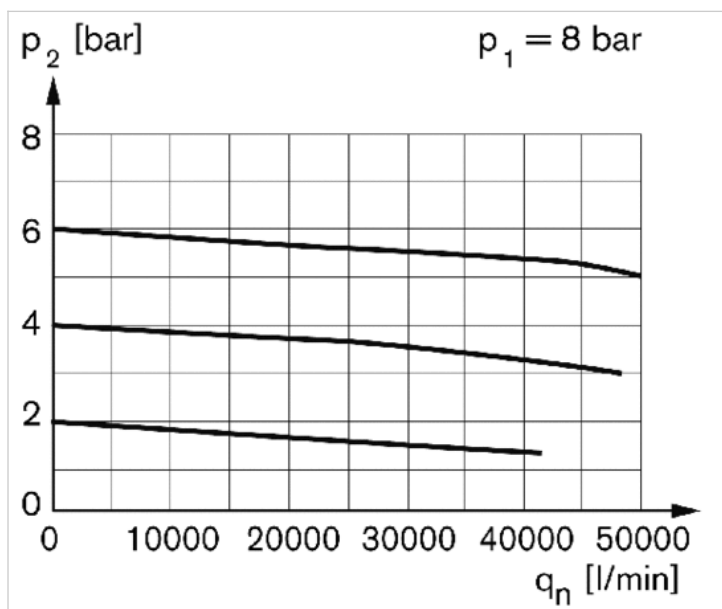

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Circuit diagram

Application example

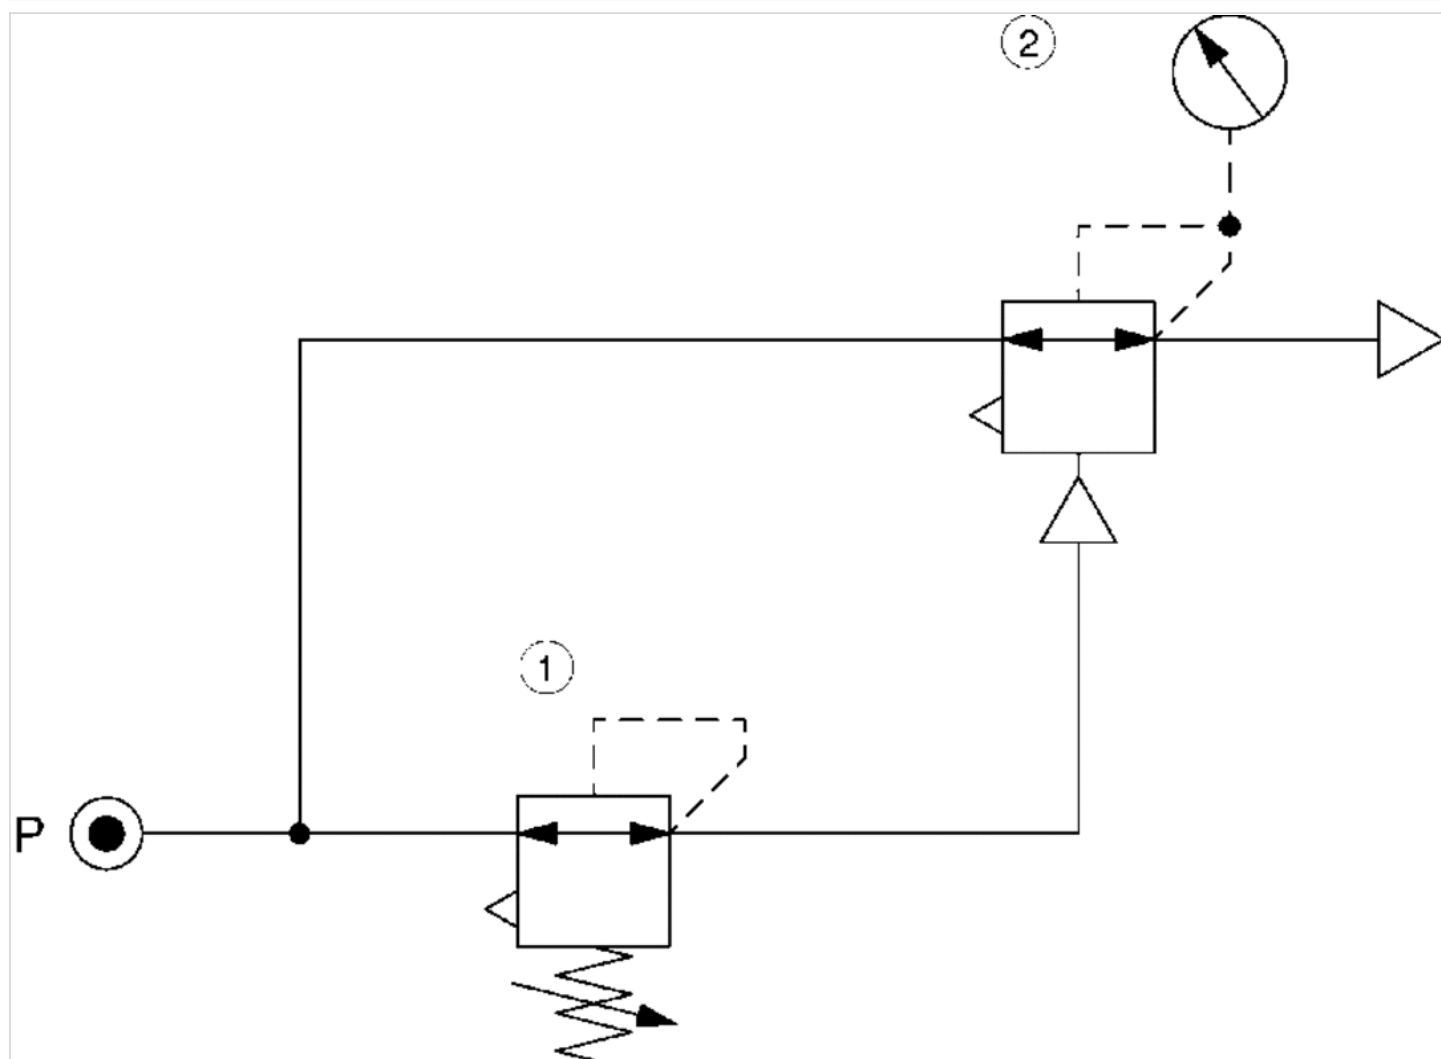


1) precision pressure regulator

2) pressure regulator valve, pneumatically operated

Pressure regulator, Series MU1-RGS

- G 1/8 G 1/4
- Qn = 450 l/min
- Standard pressure regulator
- Activation Mechanical

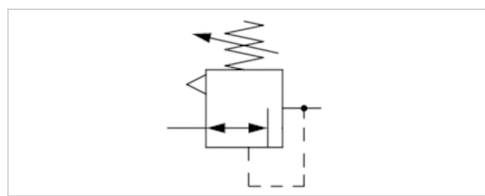

Parts	Pressure regulator
Mounting orientation	Any
Working pressure min./max.	0.5 ... 25 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	See table below
Pressure supply	single
Activation	Mechanical
Weight	See table below

Technical data

Part No.	Port	Flow	Adjustment range min./max.	Weight
		Qn		
0821302425	G 1/8	450 l/min	0.1 ... 3.5 bar	0.14 kg
0821302426	G 1/8	450 l/min	0.15 ... 7 bar	0.14 kg
0821302427	G 1/8	450 l/min	0.4 ... 10 bar	0.14 kg
0821302429	G 1/4	450 l/min	0.1 ... 3.5 bar	0.12 kg
0821302448	G 1/4	450 l/min	0.15 ... 7 bar	0.12 kg
0821302449	G 1/4	450 l/min	0.4 ... 10 bar	0.12 kg

Nominal flow Qn with secondary pressure p2 = 6 bar at $\Delta p = 1$ bar

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
Mounting with mounting bracket 1821331013

Technical information

Material	
Housing	Die cast zinc
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

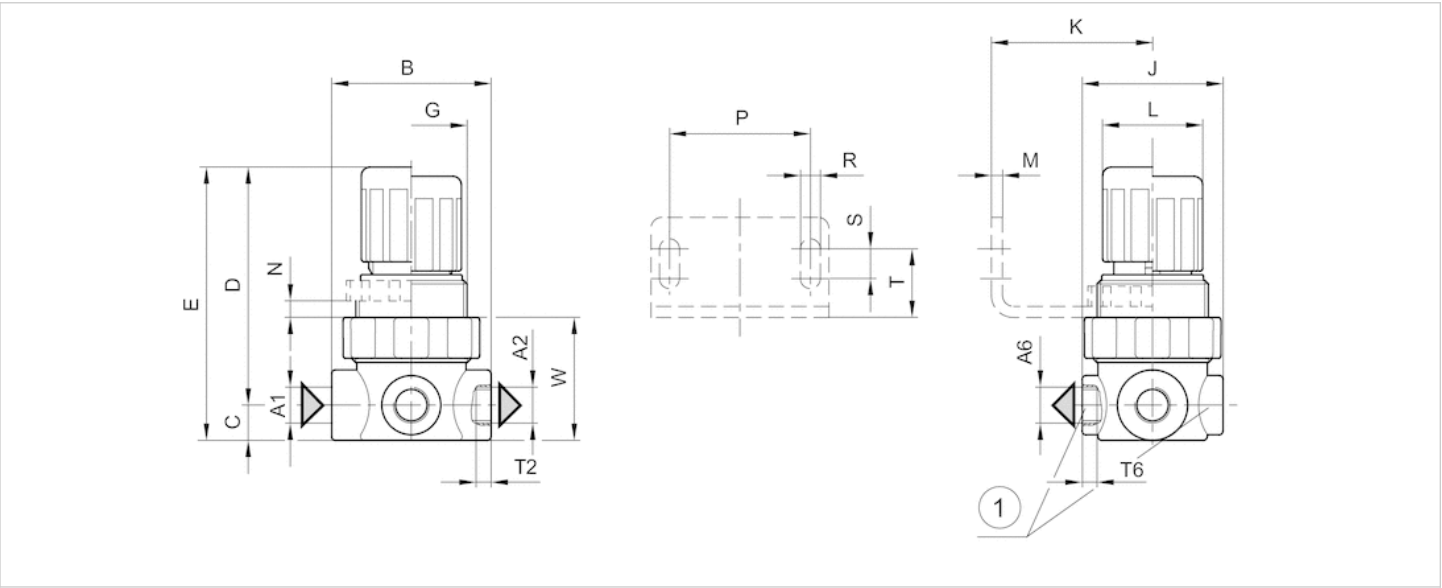


1) Pressure gauge connection

Dimensions

A1	A2	A6	B	C	D	E	G	J	K	L	M	N	P	R	S	T	T2	T6	W
G 1/8	G 1/8	G 1/8	43	9.5	61	70.5	M30x1,5	38	40	27	3	5	38	5.4	8	18.5	8	8	33
G 1/4	G 1/4	G 1/8	43	9.5	61	70.5	M30x1,5	38	40	27	3	5	38	5.4	8	18.5	8	8	33


Diagrams

Pressure characteristics curve

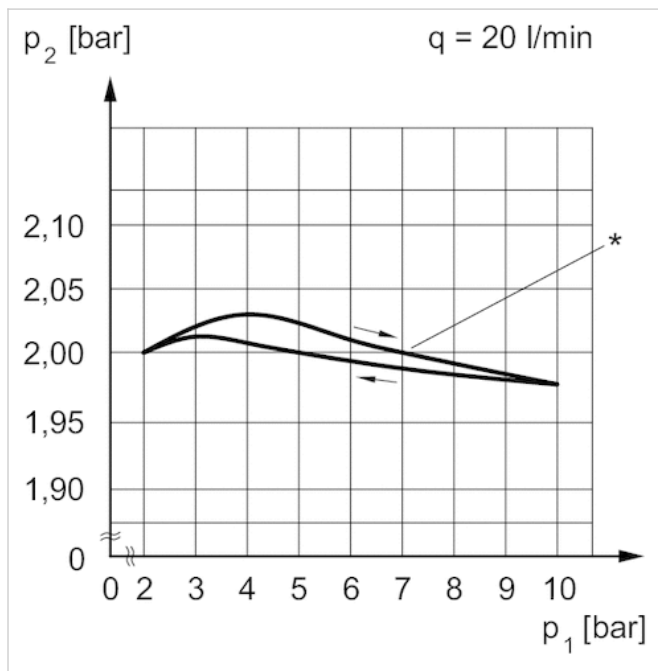


p_1 = working pressure
 p_2 = secondary pressure
 q = flow rate
 * starting point

Flow rate characteristic

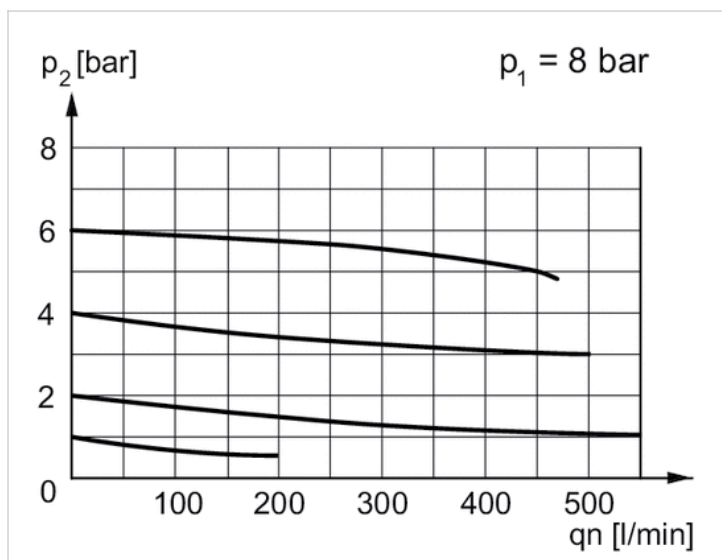


p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Exhaust

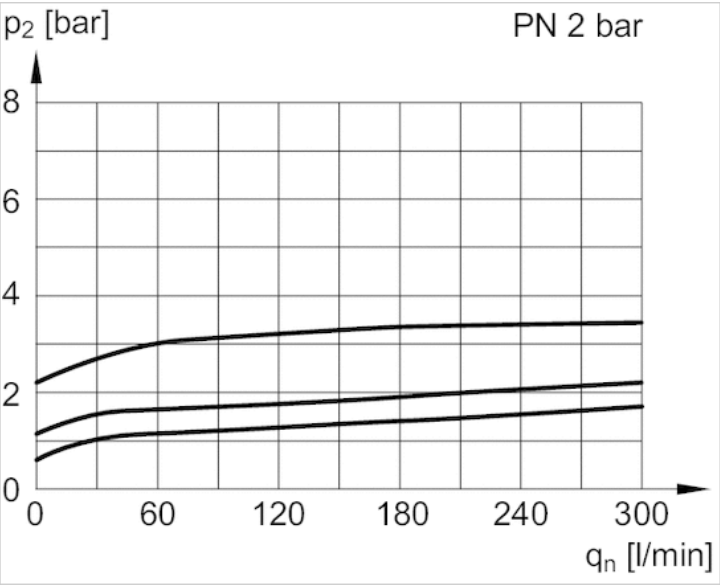


p_2 = secondary pressure
 q_n = nominal flow

Exhaust

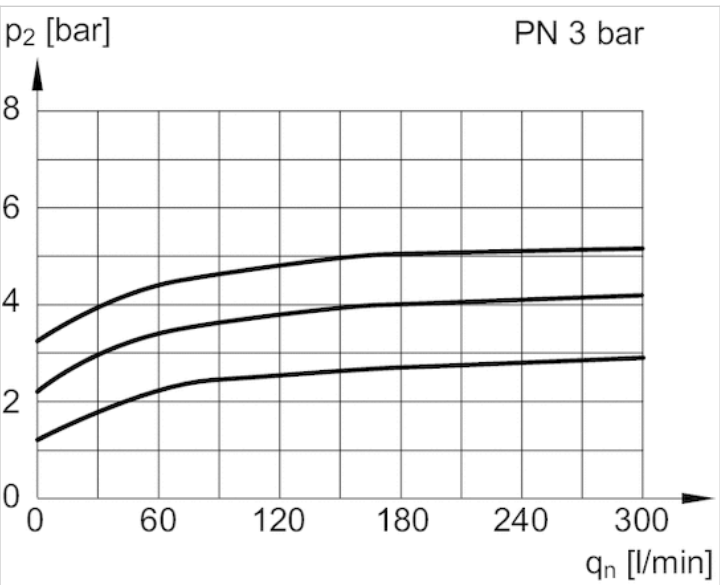

p_2 = secondary pressure
 q_n = nominal flow

Exhaust

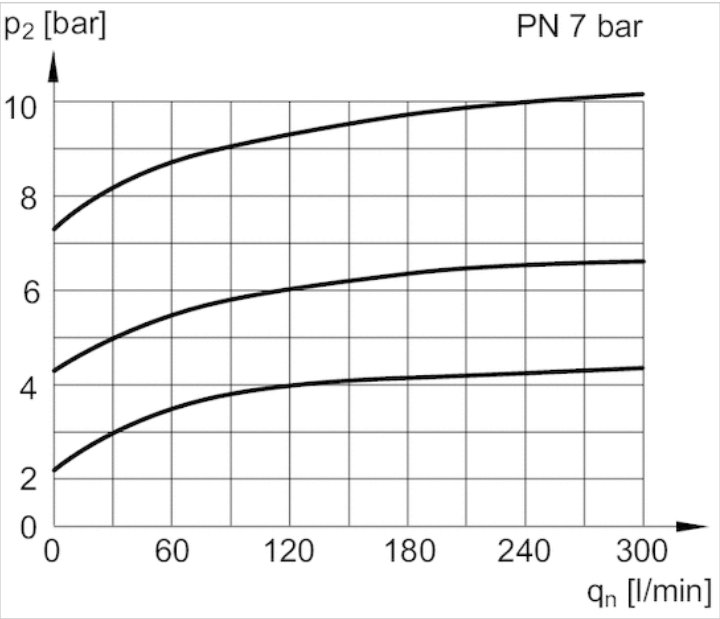


p_2 = secondary pressure
 q_n = nominal flow

Pressure regulator, Series MU1-RGS

- G 1/4
- Qn = 450 l/min
- Standard pressure regulator
- Activation Mechanical
- Medium: oxygen, Compressed air, Neutral gases



Parts	Pressure regulator
Mounting orientation	Any
Working pressure min./max.	0.5 ... 14 bar
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air Neutral gases Oxygen
Regulator type	Diaphragm-type pressure regulator
Regulator function	Without relieving exhaust
Adjustment range min./max.	0.4 ... 10 bar
Pressure supply	single
Activation	Mechanical
Weight	0.35 kg

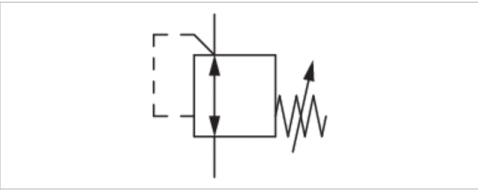

Technical data

Part No.	Port	Flow
		Qn
R412007781	G 1/4	450 l/min

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
Mounting with mounting bracket 1821331013

Technical information

Material	
Housing	Brass
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

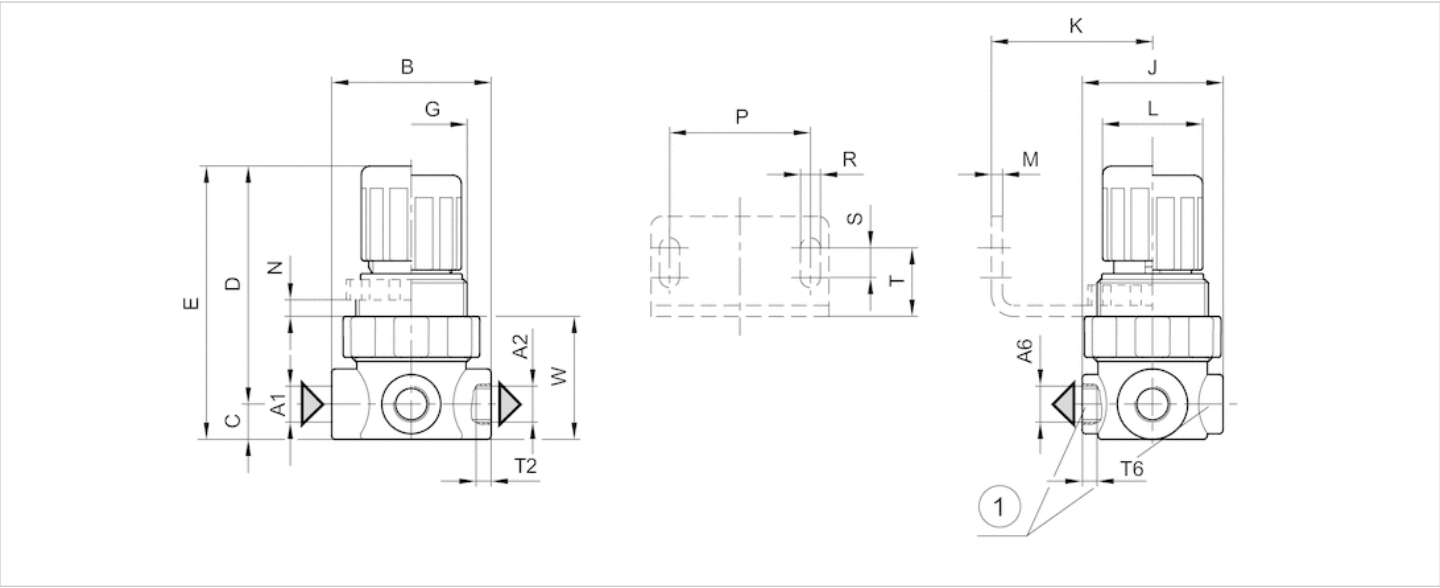


1) Pressure gauge connection

Dimensions

A1	A2	A6	B	C	D	E	G	J	K	L	M	N	P	R	S	T	T2	T6	W
G 1/4	G 1/4	G 1/8	43	9.5	61	70.5	M30x1,5	38	40	27	3	5	38	5.4	8	18.5	8	8	33

Diagrams


Pressure characteristics curve

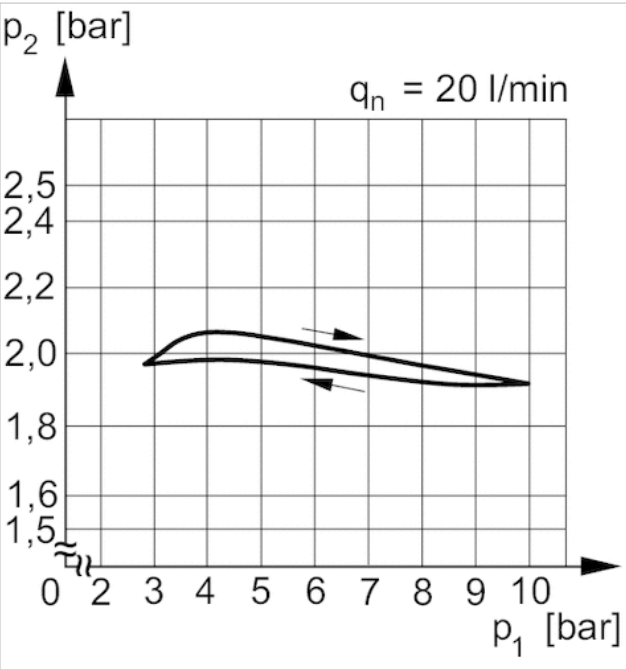

p1 = Working pressure
p2 = Secondary pressure

q_n = Nominal flow


Flow rate characteristic

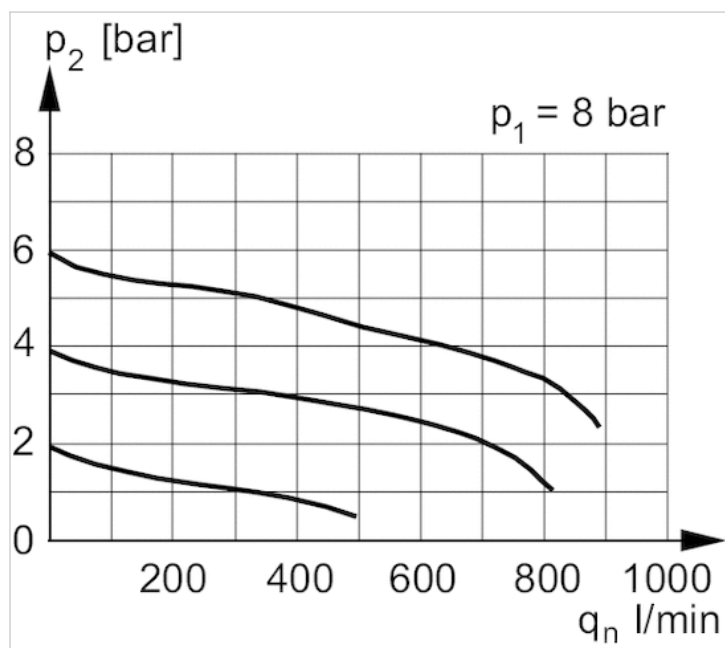

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Pressure regulator, Series MU1-RGS

- G 1/2
- Qn = 5500 l/min
- Standard pressure regulator
- Activation pneumatically

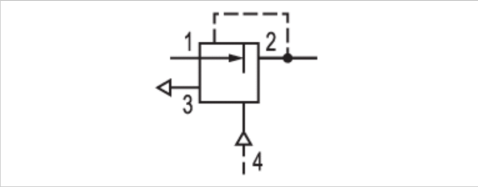

Parts	Pressure regulator
Mounting orientation	Any
Working pressure min./max.	0.5 ... 13 bar
Control pressure min./max.	8 bar
Ambient temperature min./max.	-10 ... 80 °C
Medium temperature min./max.	-10 ... 80 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.2 ... 8 bar
Pressure supply	single
Activation	pneumatically
Weight	1.1 kg

Technical data

Part No.	Port	Flow
		Qn
0821302026	G 1/2	5500 l/min

control pressure port: G 1/4, Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
Mounting with 4 mounting screws M8 DIN 934 (not in scope of delivery)
Relieving exhaust (≤ 0.2 bar over set pressure)

Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions


Dimensions

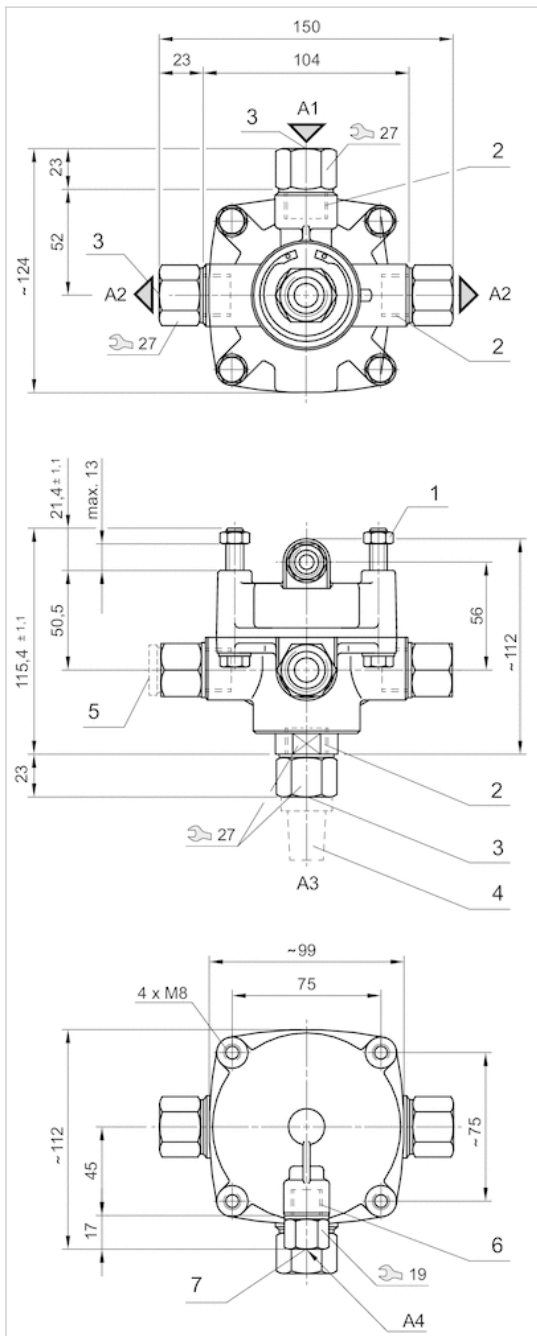


- (1) not included in scope of delivery (4 x M8, DIN 934)
- (2) M22x1.5, min. 13 mm deep
- (3) G 1/2, 17 mm deep
- (4) silencer (not included in scope of delivery)
- (5) blanking screw, to be fitting when only one connection is used (not included in scope of delivery)
- (6) M16x1.5, min. 12 mm deep
- (7) G 1/4, 12 mm deep

Diagrams

Pressure characteristics curve

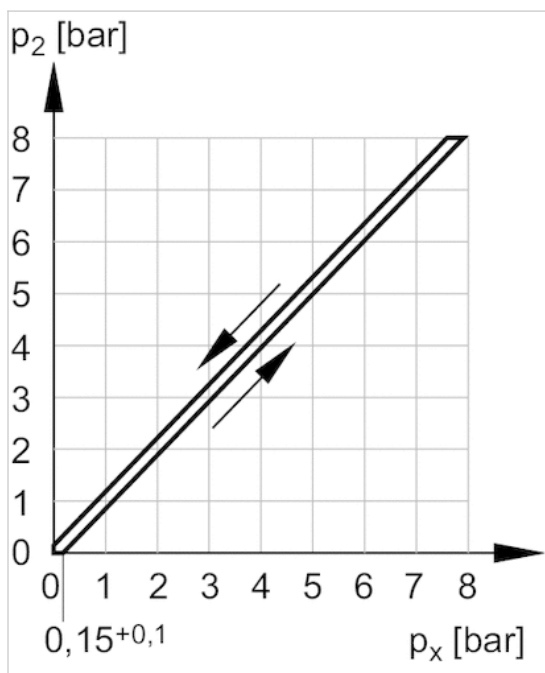


p_x = control pressure
 p_2 = outlet pressure

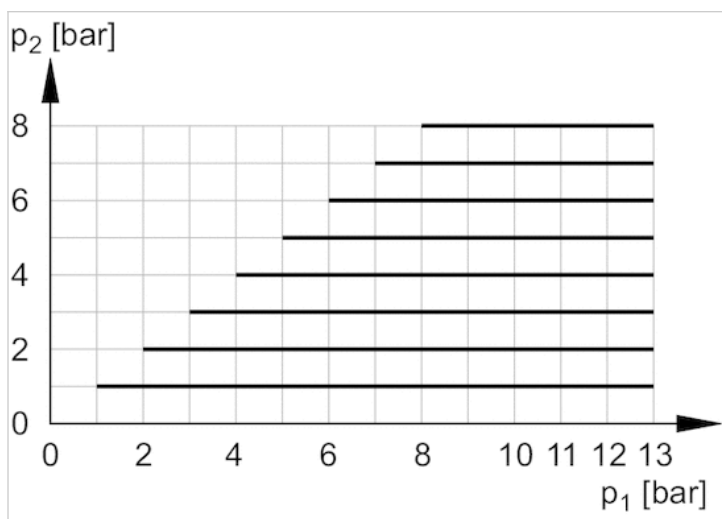


Input pressure p_1 /output pressure p_2
 p_1 = working pressure, p_2 = secondary pressure, p_x = control pressure

Flow rate characteristic, from connection 1 to 2

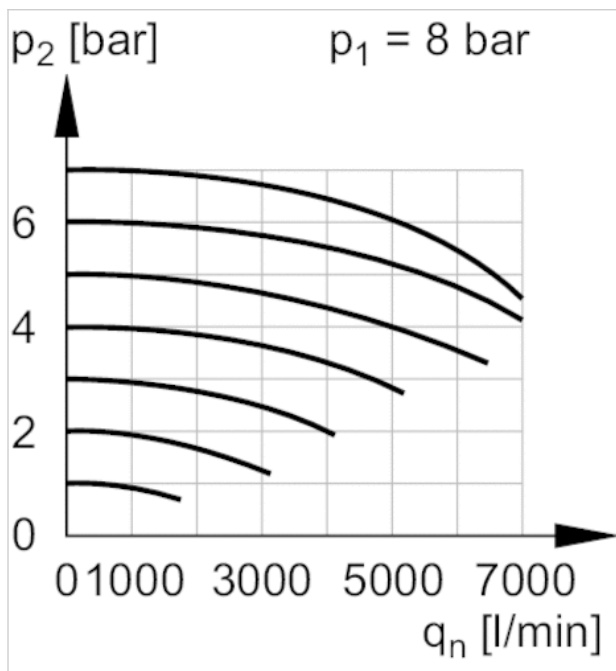

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow


Flow rate characteristic, from connection 2 to 3

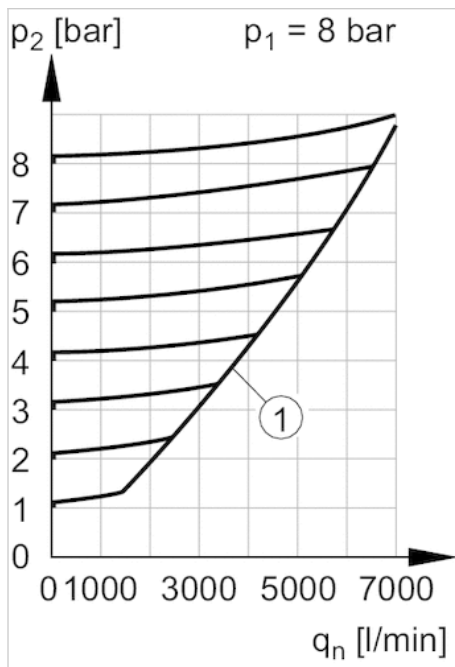

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow
 1) with silencer 1827000003

Circuit diagram

Application example

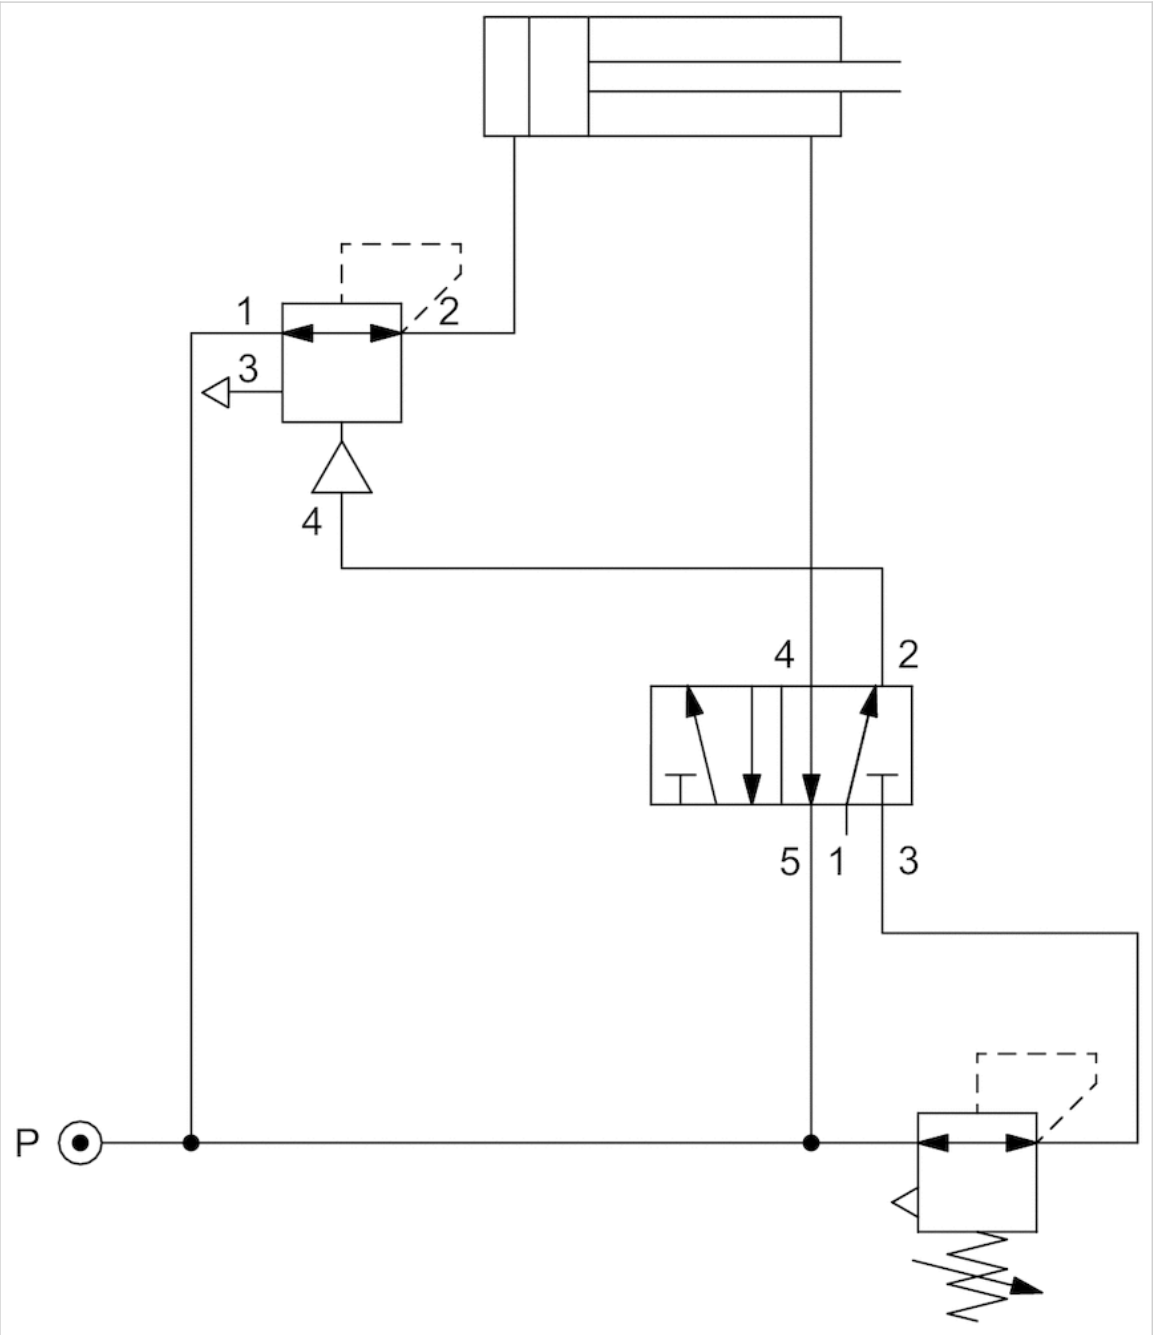

Filter pressure regulator, Series MU1-FRE

- G 1
- filter porosity 40 µm



Version	1-part
Parts	Filter pressure regulator
Mounting orientation	vertical
Working pressure min./max.	0.5 ... 16 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Nominal flow Qn	7000 l/min
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 ... 10 bar
Pressure supply	single
Filter reservoir volume	300 cm³
Filter element	exchangeable
Condensate drain	Manual
Weight	2.4 kg

Technical data

Part No.	Port	filter porosity	Flow	Condensate drain
			Qn	
9155522410	G 1	40 µm	7000 l/min	Manual

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
Mounting: panel installation or mounting bracket R412004873

Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber
Reservoir	Die-cast aluminum
Filter insert	Polyethylene


Dimensions

Dimensions

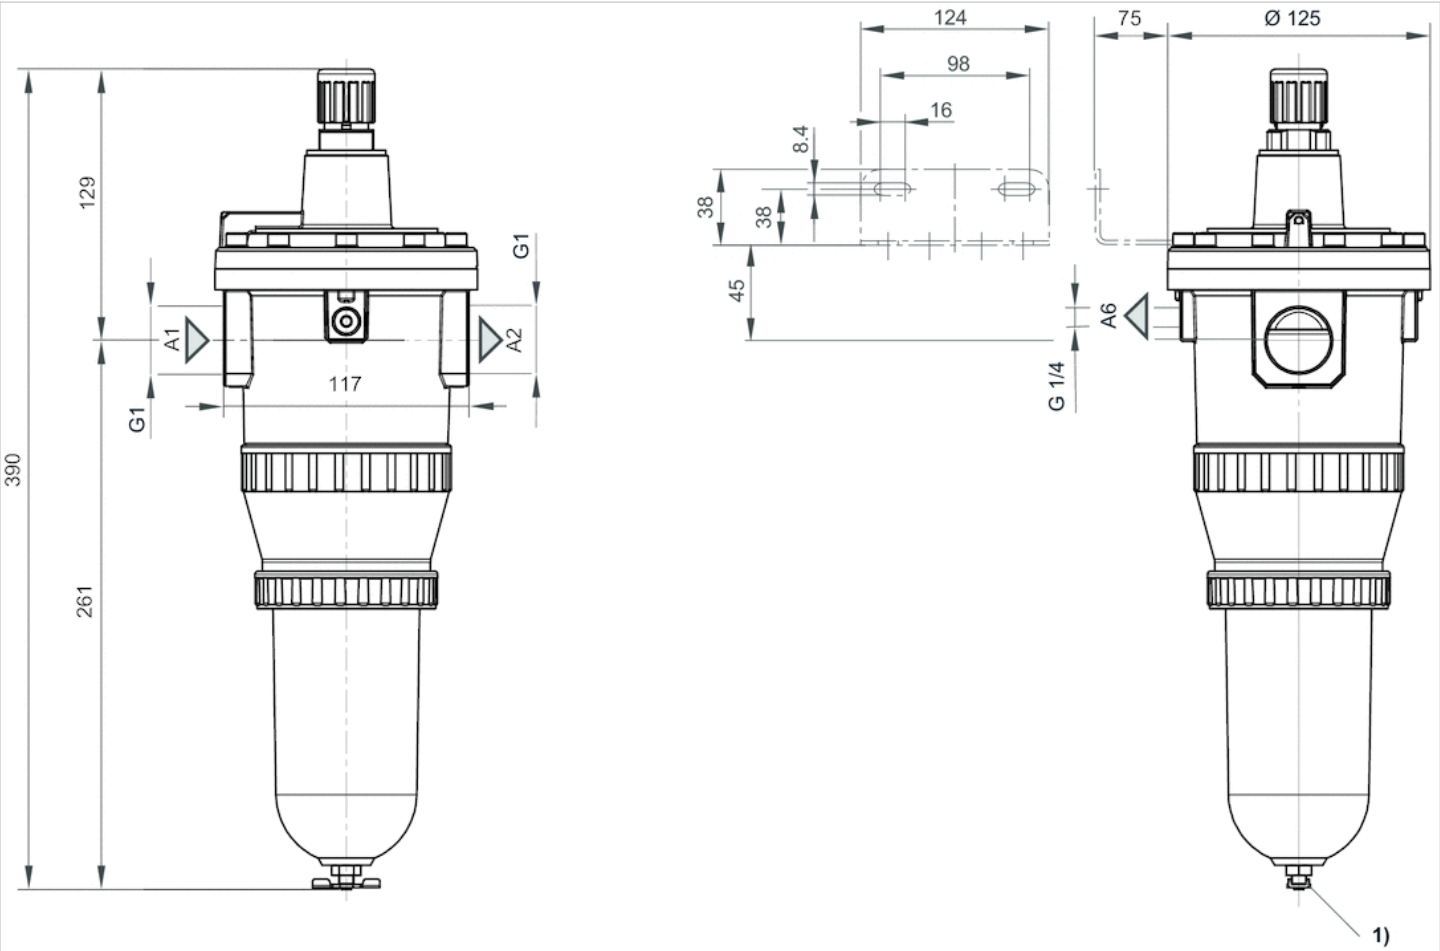


Diagrams

Pressure characteristics curve

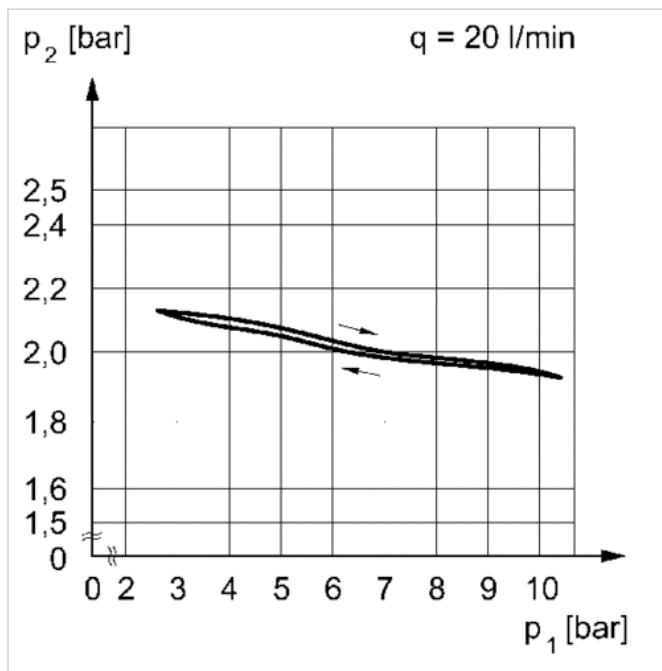

p_1 = working pressure
 p_2 = secondary pressure
 q_n = nominal flow
 q = flow rate

Flow rate characteristic

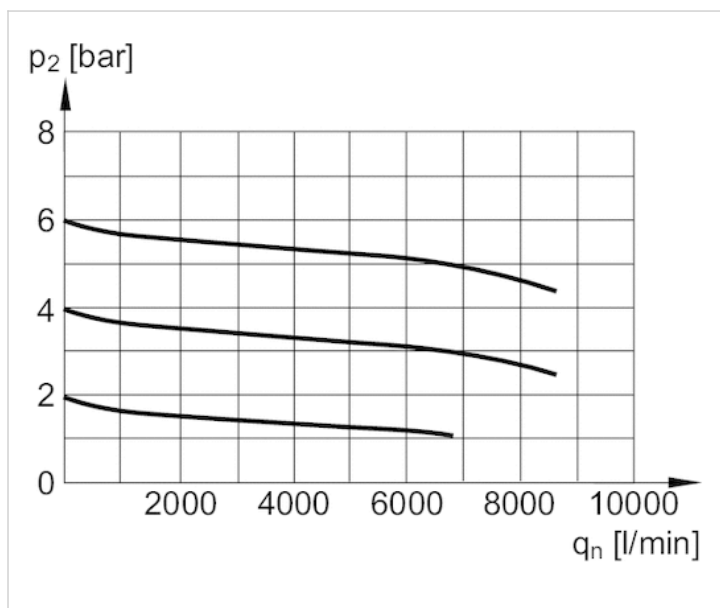

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

Filter, Series MU1-FLS

- G 1

- filter porosity 40 µm



Version

Parts

Mounting orientation

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Filter reservoir volume

Filter element

filter porosity

Condensate drain

Weight

Standard filter

Filter

vertical

See table below

-10 ... 60 °C

-10 ... 60 °C

Compressed air Neutral gases


65 cm³

exchangeable

40 µm

See table below

1.05 kg

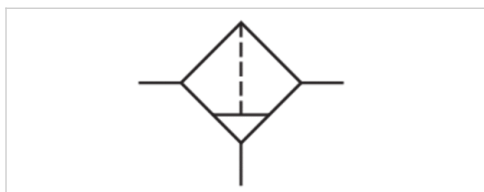

Technical data

Part No.	Port	Flow Qn	Working pressure min./max.	Condensate drain
R412006562	G 1	4000 l/min	2 ... 16 bar	semi-automatic, open without pressure
R412006585	G 1	4000 l/min	0 ... 25 bar	Manual

Part No.	Version	ATEX	
R412006562	reservoir, polycarbonate, with metal protective guard	suitable for ATEX	1)
R412006585	Metal reservoir without window	-	-

Nominal flow Qn with secondary pressure p₂ = 6 bar at Δp = 1 bar

1) Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting: mounting bracket R412004874 or installation in piping


Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber
Reservoir	Polycarbonate Die cast zinc

Material	
Protective guard	Steel
Filter insert	Polyethylene

Dimensions

Dimensions

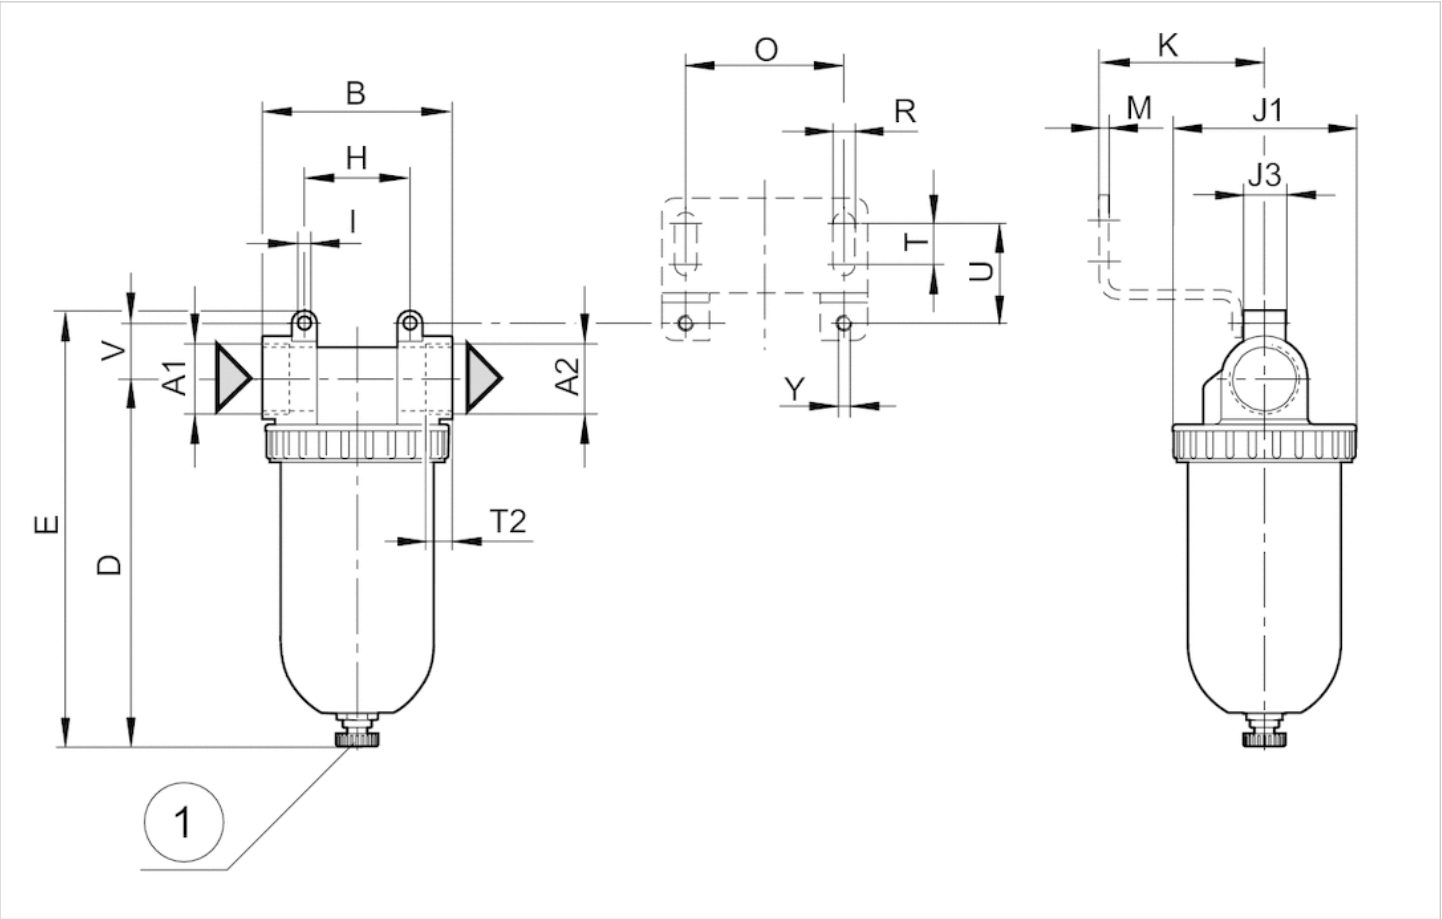


1) manual or semi-automatic condensate drain

Dimensions

A1	A2	B	D ±5	E ±7	H	I	J1	J3	K	M	O	R	T	T2	U	V	Y
G 1	G 1	90	174	206	50	6.2	87	20	55	3	50	7	13	16	31.5	26.5	M6

Diagrams

Flow rate characteristic

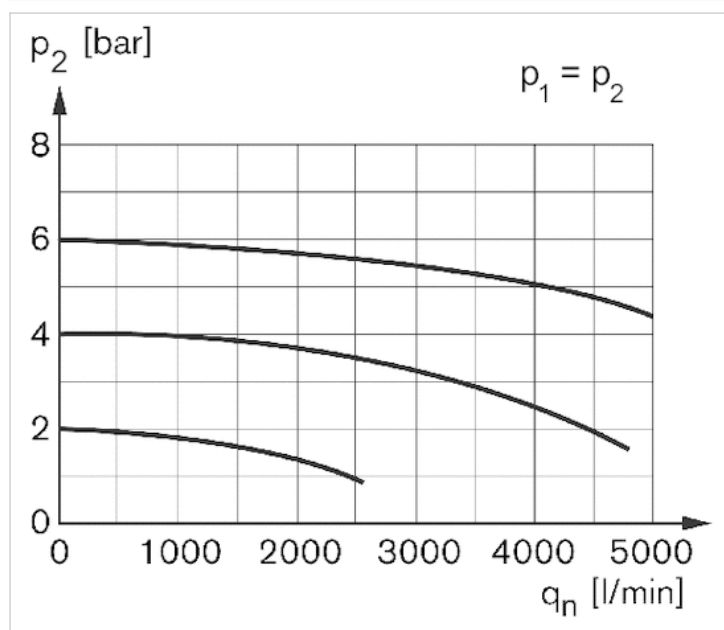

p_2 = secondary pressure
 q_n = nominal flow

Filter, Series MU1-FLS

- G 1 G 1 1/4 G 1 1/2

- filter porosity 40 µm



Version

Parts

Mounting orientation

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Filter reservoir volume

Filter element

filter porosity

Condensate drain

Weight

Standard filter

Filter

vertical

See table below

-10 ... 60 °C

-10 ... 60 °C

Compressed air Neutral gases


300 cm³

exchangeable

40 µm

See table below

1.5 kg

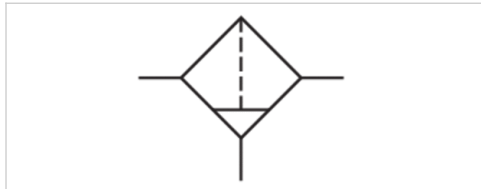

Technical data

Part No.	Port	Flow Qn	Working pressure min./max.
R412007587	G 1	12500 l/min	1.5 ... 16 bar
9155520220	G 1	12500 l/min	0 ... 25 bar
R412007588	G 1 1/4	12500 l/min	1.5 ... 16 bar
R412006583	G 1 1/4	12500 l/min	1.5 ... 16 bar
R412006565	G 1 1/4	12500 l/min	0 ... 25 bar
R412007599	G 1 1/2	12500 l/min	1.5 ... 16 bar
R412006566	G 1 1/2	12500 l/min	0 ... 25 bar

Part No.	Condensate drain
R412007587	semi-automatic, open without pressure
9155520220	fully automatic, open without pressure
R412007588	semi-automatic, open without pressure
R412006583	fully automatic, open without pressure
R412006565	Manual
R412007599	fully automatic, open without pressure
R412006566	Manual

Part No.	Version	ATEX	
R412007587	reservoir, polycarbonate, with metal protective guard	suitable for ATEX	1)
9155520220	Metal reservoir without window	suitable for ATEX	1)
R412007588	reservoir, polycarbonate, with metal protective guard	suitable for ATEX	1)
R412006583	Metal reservoir without window	suitable for ATEX	1)

Part No.	Version	ATEX	
R412006565	Metal reservoir without window	suitable for ATEX	1)
R412007599	Metal reservoir without window	suitable for ATEX	1)
R412006566	Metal reservoir without window	-	-

Nominal flow Q_n with secondary pressure 6 bar at $\Delta p = 1$ bar

1) Suitable for use in Ex zones 1, 2, 21, 22., suitable for ATEX

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
mounting: for installing in piping or via 2 through-holes in housing

Technical information

Material	
Housing	Die cast zinc
Seals	Acrylonitrile butadiene rubber
Reservoir	Polycarbonate
Protective guard	Steel
Filter insert	Polyethylene

Dimensions

Dimensions

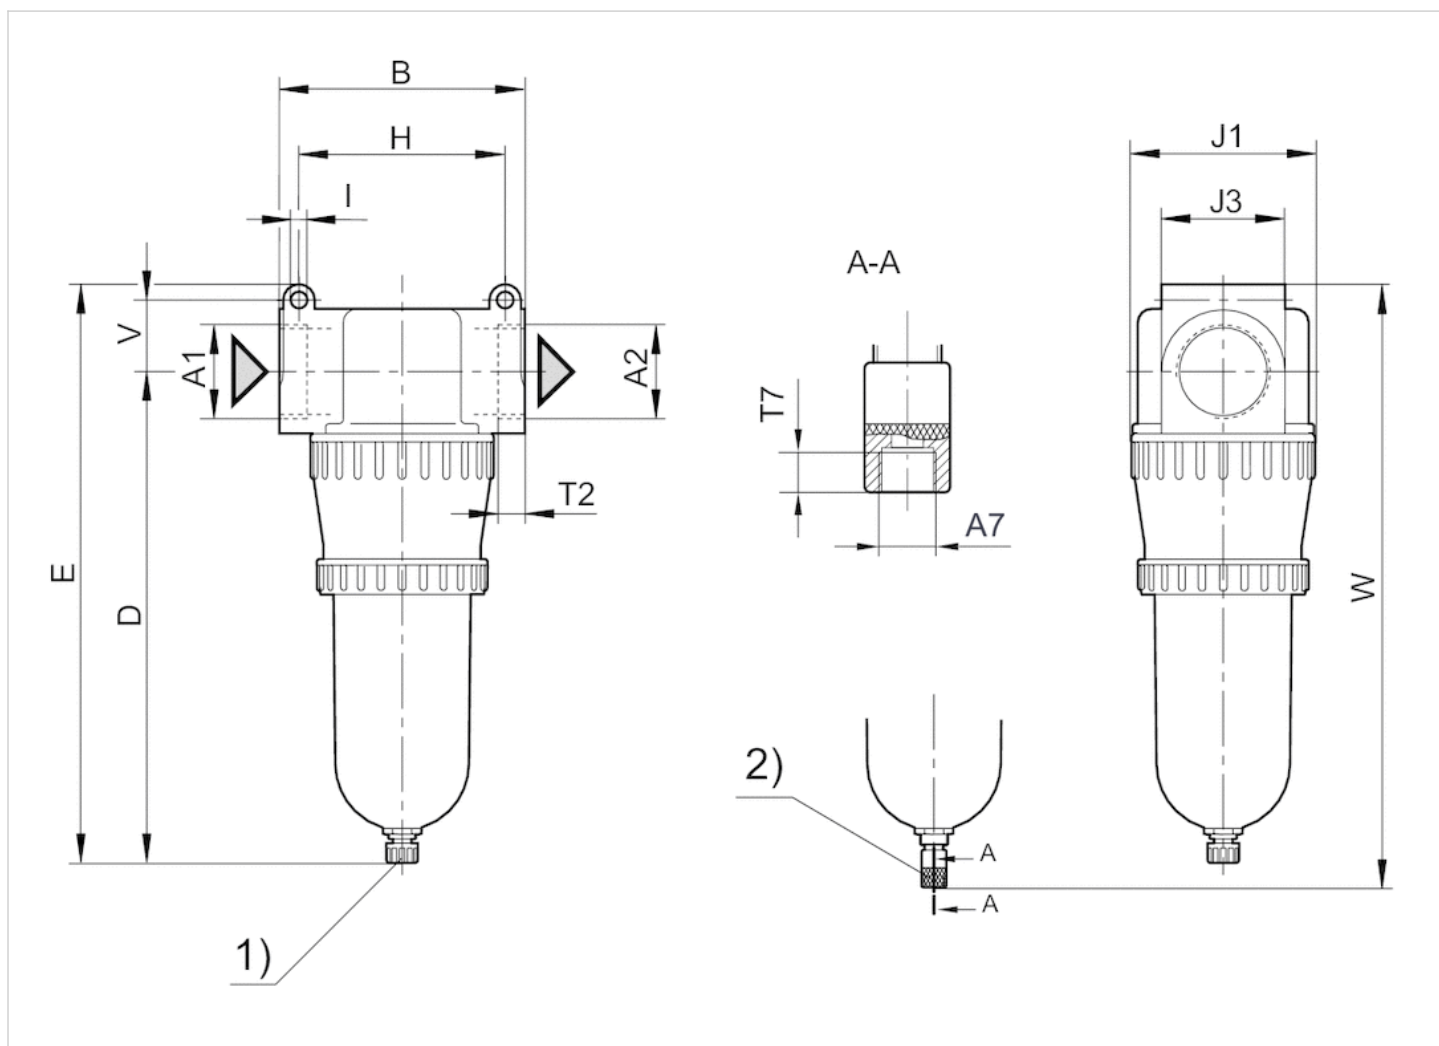


1) manual + semi-automatic condensate drain 2) fully automatic condensate drain

Dimensions

A1	A2	A7	B ±7	D ±7	E ±7	H	I	J1	J3	T2	T7	V ±5	W ±7
G 1	G 1	G 1/8	125	250	286.5	105	8.5	100	63	25	8.5	36.5	307
G 1 1/4	G 1 1/4	G 1/8	125	250	286.5	105	8.5	100	63	25	8.5	36.5	307
G 1 1/2	G 1 1/2	G 1/8	125	250	286.5	105	8.5	100	63	25	8.5	36.5	307

Diagrams

Flow rate characteristic

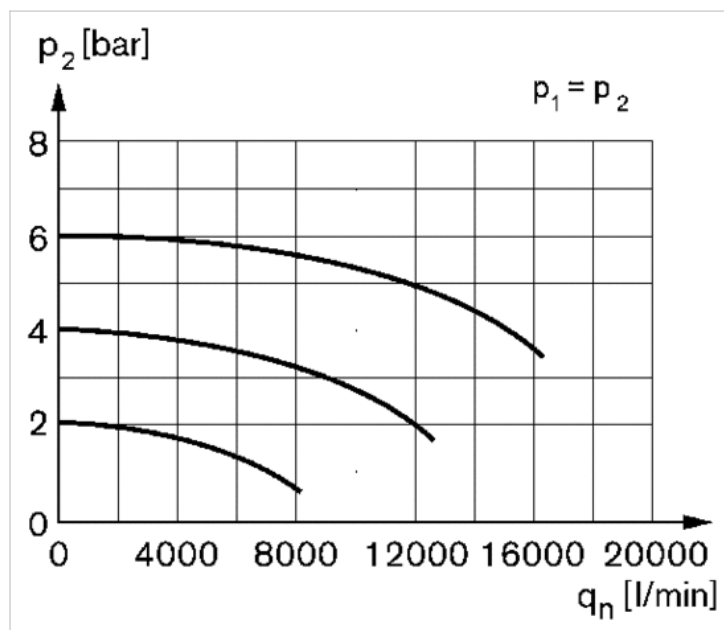


p_2 = secondary pressure
 q_n = nominal flow

Filter, Series MU1-FLS

- G 1 1/2 G 2
- filter porosity 8 60 µm
- suitable for ATEX



Version	Standard filter
Parts	Filter
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	See table below
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Filter reservoir volume	300 cm ³
Filter element	exchangeable
Condensate drain	See table below
Weight	3.5 kg

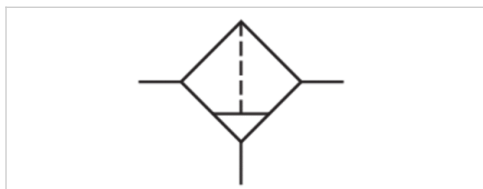

Technical data

Part No.	Port	filter porosity	Flow Qn	Working pressure min./max.
R412000667	G 1 1/2	8 µm	30000 l/min	0 ... 16 bar
R412006568	G 2	60 µm	30000 l/min	0 ... 16 bar
R412006570	G 2	60 µm	30000 l/min	2 ... 12 bar
R412006571	G 2	8 µm	30000 l/min	2 ... 12 bar

Part No.	Condensate drain
R412000667	Manual
R412006568	Manual
R412006570	fully automatic, open without pressure
R412006571	fully automatic, open without pressure

Part No.	Version
R412000667	reservoir, polycarbonate, with metal protective guard
R412006568	reservoir, polycarbonate, without protective guard
R412006570	Metal reservoir without window
R412006571	Metal reservoir without window

Suitable for use in Ex zones 1, 2, 21, 22., Nominal flow Qn with secondary pressure p₂ = 6 bar at Δp = 1 bar, Metal protective guard can be retrofitted for all polycarbonate reservoirs

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting via 2 through-holes in housing


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Die cast zinc
Seals	Acrylonitrile butadiene rubber
Reservoir	Polycarbonate
Protective guard	Steel
Filter insert	Polyethylene

Dimensions

Dimensions

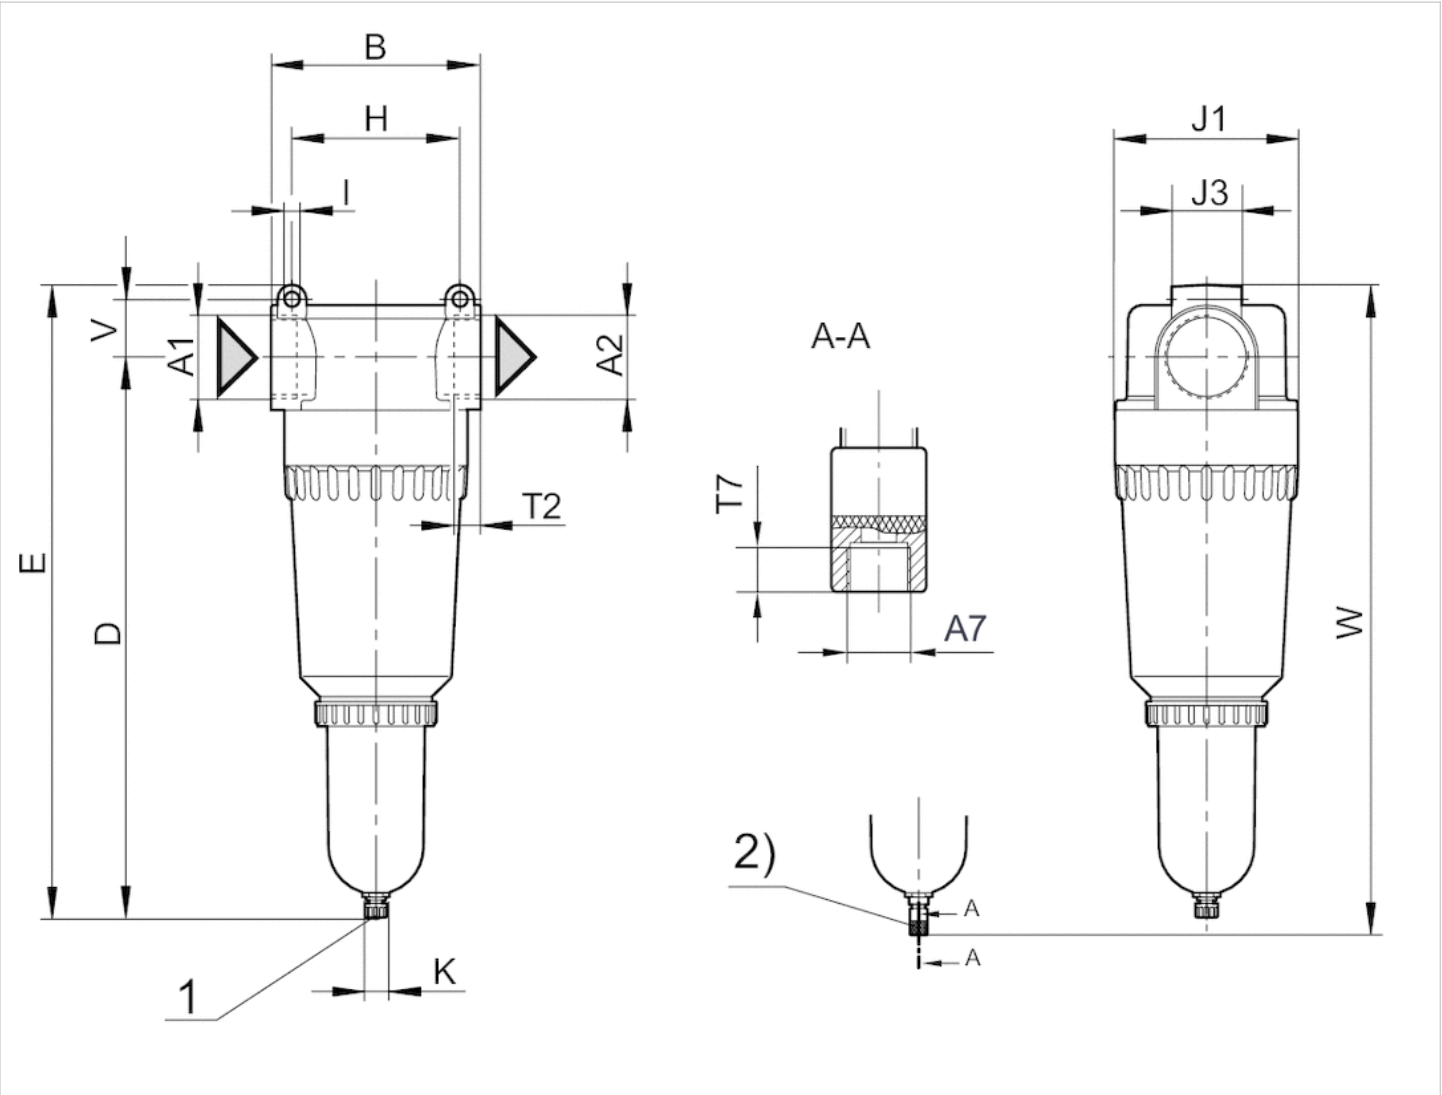


- 1) manual condensate drain
- 2) fully automatic condensate drain

Dimensions

A1	A2	A7	B ±7	D ±7	E ±7	H	I	J1	J3	T2	T7	V ±5	W ±7
G 1 1/2	G 1 1/2	G 1/8	150	383	424	120	10.5	131	50	24	8.5	41	441.5
G 2	G 2	G 1/8	150	400.5	452	120	10.5	131	50	24	8.5	41	464.5

Diagrams

Flow rate characteristic

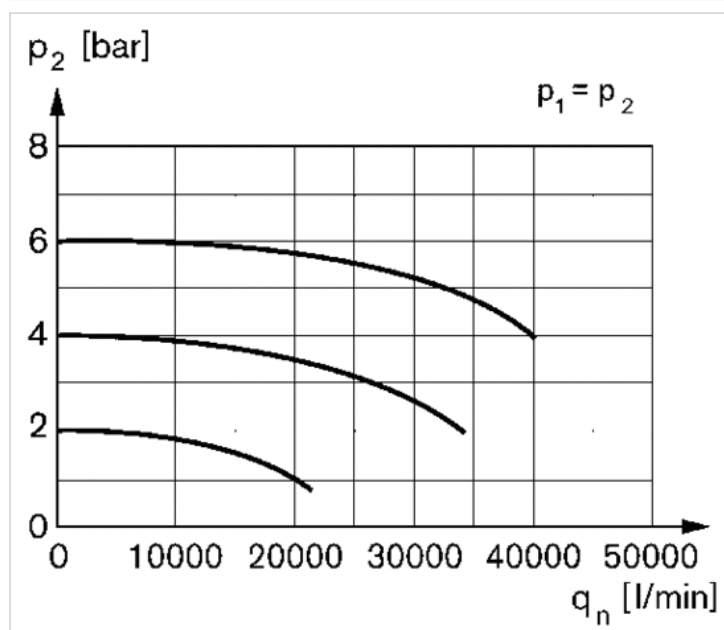

p_2 = secondary pressure
 q_n = nominal flow


Standard oil-mist lubricator, Series MU1-LBS

- G 1 1/4 G 1 1/2

- suitable for ATEX



Version	Oil-mist lubricator
Parts	Standard oil-mist lubricator
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	0.5 ... 25 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Lubricator reservoir volume	550 cm ³
Type of filling	Manual oil filling
Weight	1.5 kg

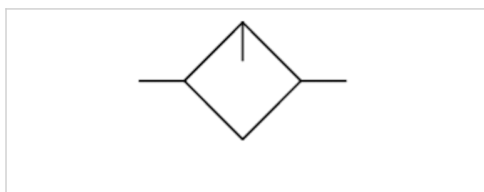

Technical data

Part No.	Port	Nominal flow Q _n	Material Reservoir
R412006579	G 1 1/4	9000 l/min	Die-cast aluminum
R412006580	G 1 1/2	9000 l/min	Die-cast aluminum

Suitable for use in Ex zones 1, 2, 21, 22., Nominal flow with secondary pressure 6.3 bar at $\Delta p = 1$ bar

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting via 2 through-holes in housing

Manual oil filling possible during operation.

Suitable for use in Ex zones 1, 2, 21, 22.


Oil dosing at 1000 l/min 1-2 drops

Technical information

Material	
Housing	Die cast zinc
Seals	Acrylonitrile butadiene rubber
Reservoir	Die-cast aluminum

Dimensions

Dimensions

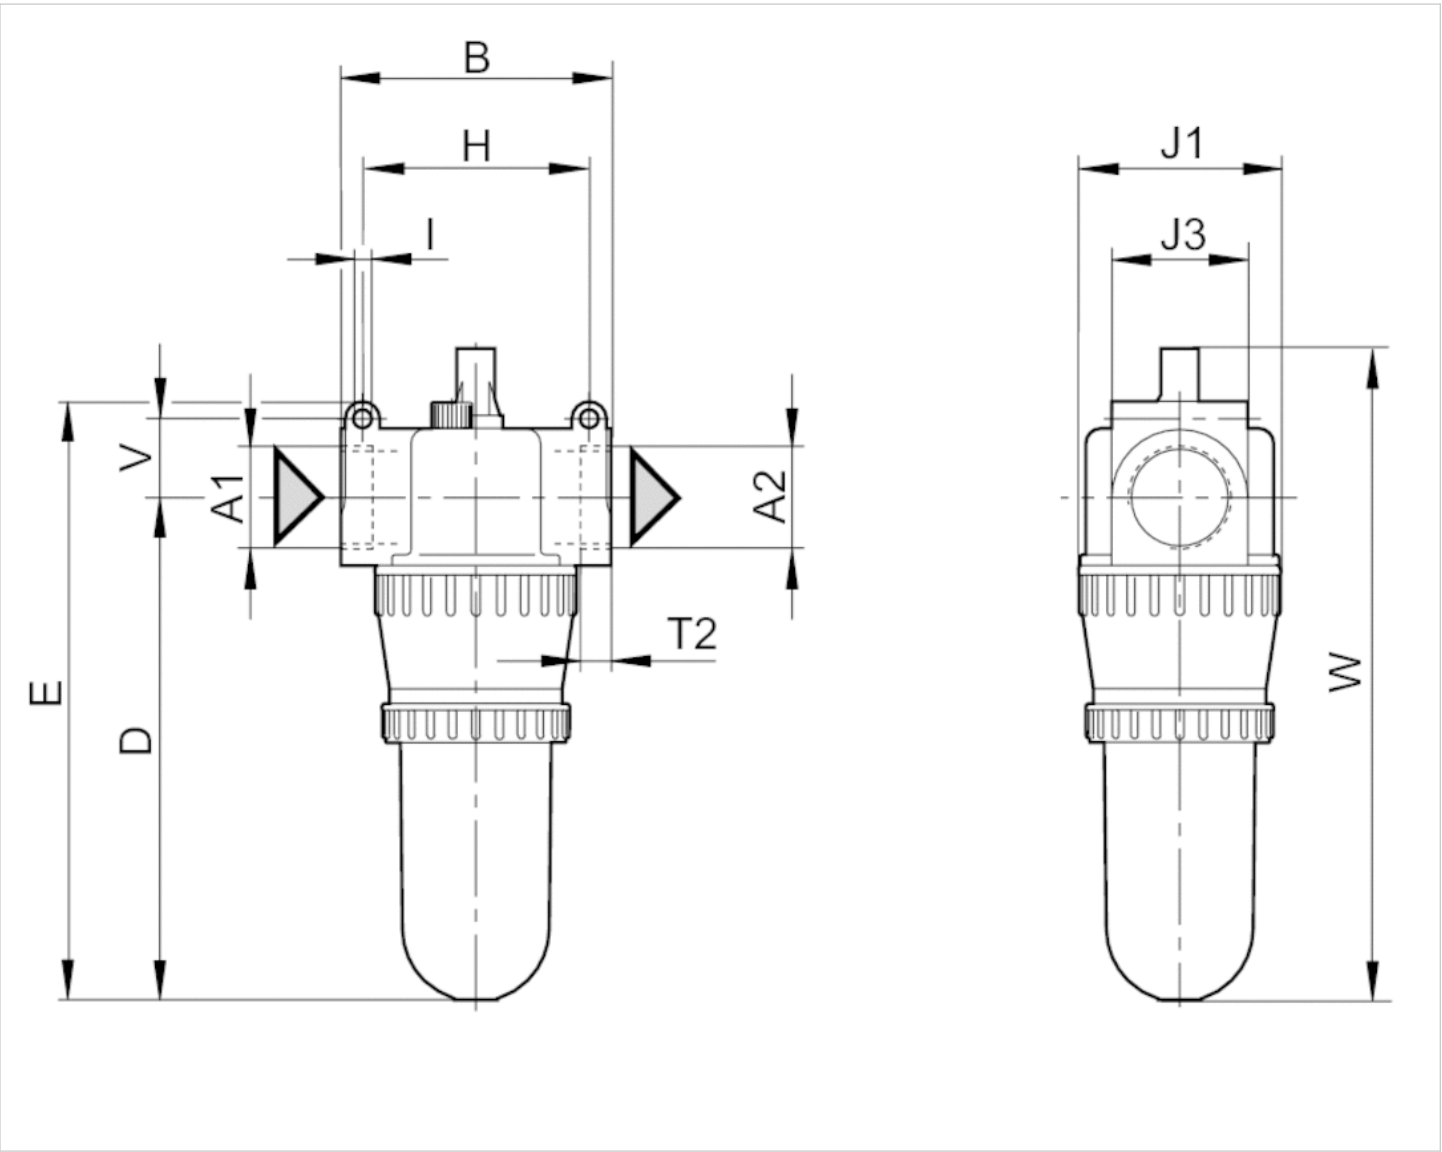


Dimensions

A1	A2	B ±7	D ±7	E ±7	H	I	J1	J3	T2	V ±5	W ±7
G 1 1/4	G 1 1/4	125	232.5	278	105	8.5	100	63	25	36.5	301.5
G 1 1/2	G 1 1/2	125	232.5	278	105	8.5	100	63	25	36.5	301.5


Diagrams

Flow rate characteristic

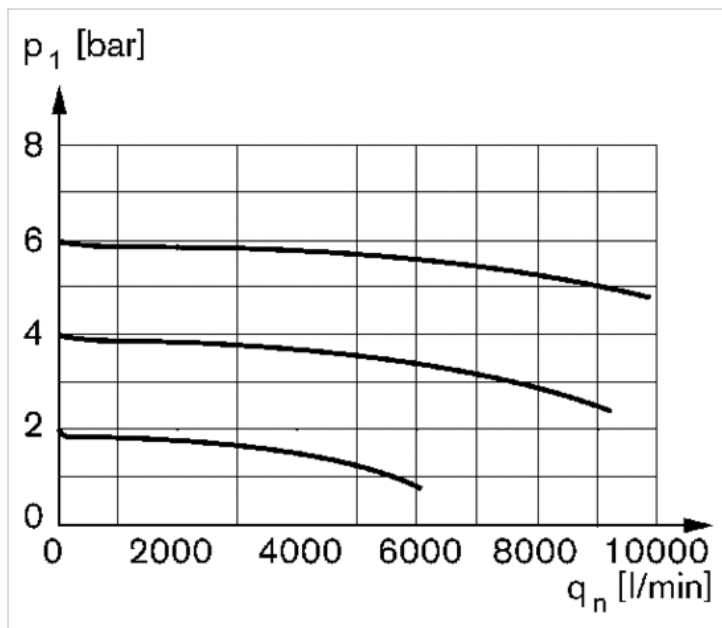

p_1 = working pressure
 q_n = nominal flow

minimum flow rate curve (flow rate necessary for the correct functioning of the lubricator)

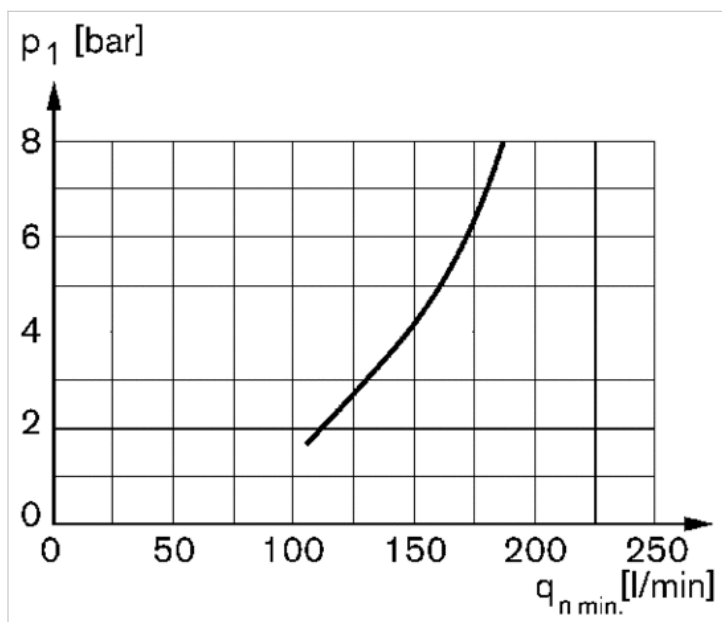

p_1 = working pressure
 q_n = nominal flow


Standard oil-mist lubricator, Series MU1-LBS

- G 2

- suitable for ATEX



Version	Oil-mist lubricator
Parts	Standard oil-mist lubricator
Mounting orientation	vertical
Certificates	suitable for ATEX
Compressed air connection	G 2
Working pressure min./max.	0.5 ... 16 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Lubricator reservoir volume	1700 cm ³
Type of filling	Manual oil filling
Weight	3.37 kg

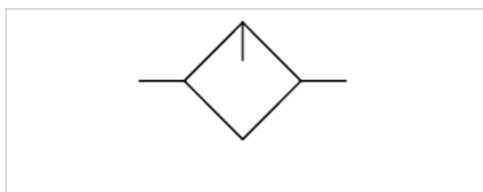

Technical data

Part No.	Port	Nominal flow Q _n	Material Reservoir	Protective guard
R412006581	G 2	25000 l/min	Polycarbonate	Steel

Suitable for use in Ex zones 1, 2, 21, 22., Nominal flow with secondary pressure 6.3 bar at $\Delta p = 1$ bar

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Mounting via 2 through-holes in housing

Manual oil filling possible during operation.

Suitable for use in Ex zones 1, 2, 21, 22.


Oil dosing at 1000 l/min 1-2 drops

Technical information

Material	
Housing	Die-cast aluminum
Seals	Acrylonitrile butadiene rubber
Reservoir	Polycarbonate
Protective guard	Steel

Dimensions

Dimensions

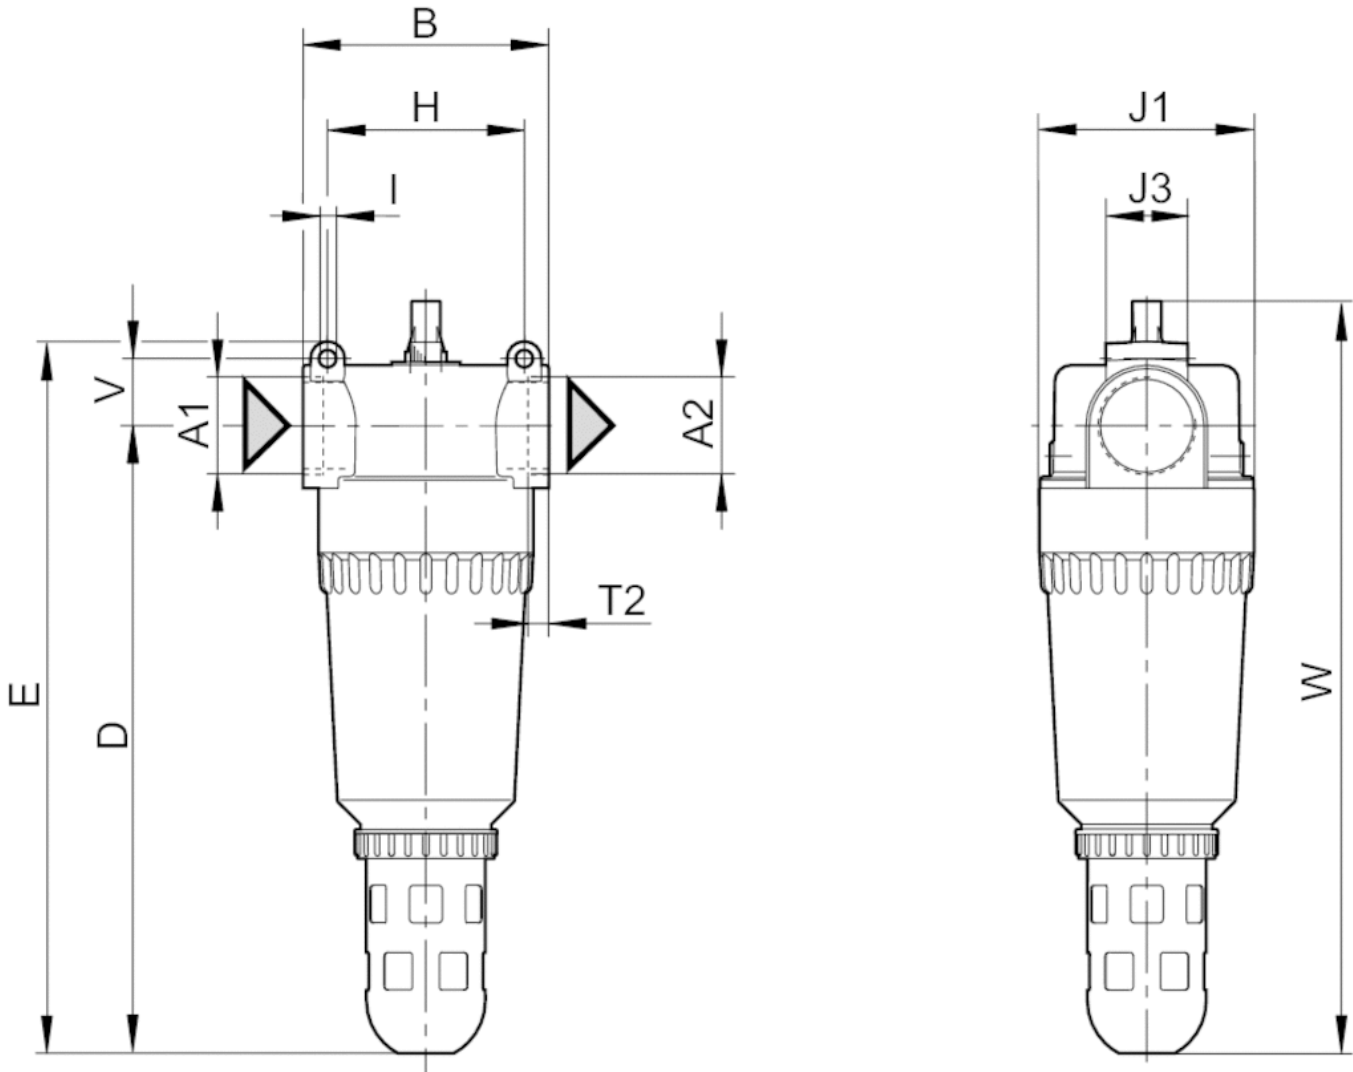


Dimensions

A1	A2	B ±7	D ±7	E ±7	H	I	J1	J3	T2	V ±5	W ±7
G 2	G 2	150	383	436	120	10.5	130	50	24	41	459


Diagrams

Flow rate characteristic

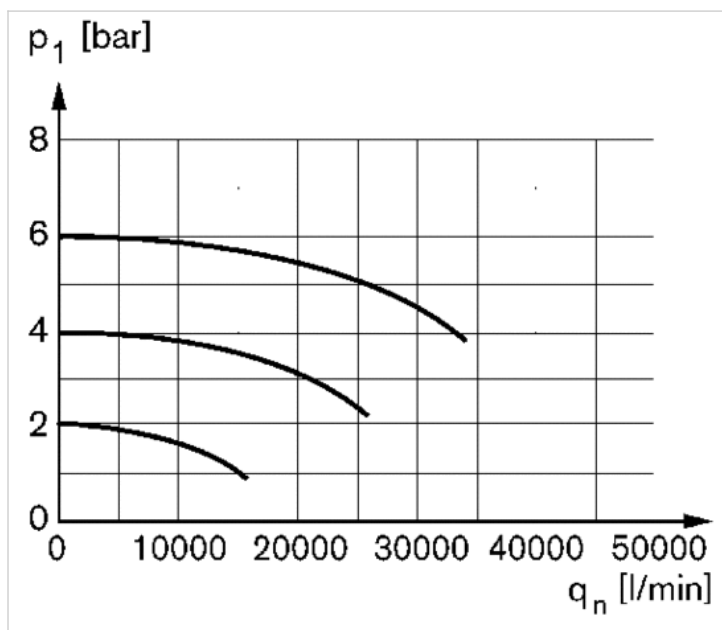

p_1 = working pressure
 q_n = nominal flow


minimum flow rate curve (flow rate necessary for the correct functioning of the lubricator)

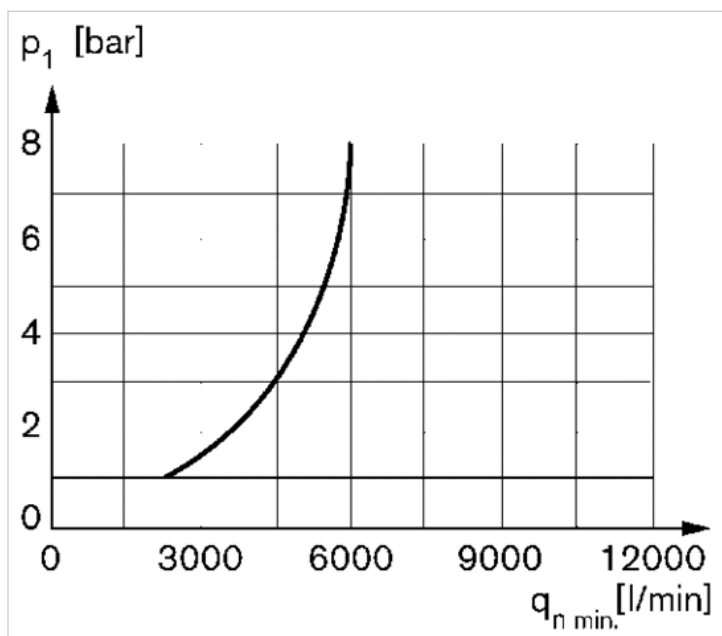

p_1 = working pressure
 q_n = nominal flow

Pressure relief valve, Series MU1

- Qn = 300 l/min

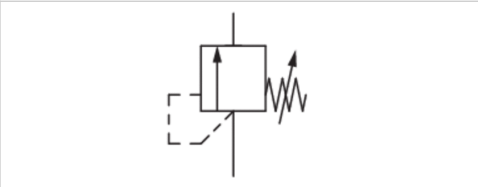

Working pressure min./max.	0 ... 10 bar
Adjustment range min./max.	See table below
Medium	Compressed air Neutral gases
Max. particle size	5 µm
Nominal flow Qn	300 l/min
Weight	See table below

Technical data

Part No.	Compressed air connection Input	Compressed air connection Output	Adjustment range min./max.	Weight
0821302043	G 1/8	G 1/8	0.1 ... 2 bar	0.14 kg
0821302044	G 1/8	G 1/8	0.15 ... 3 bar	0.14 kg
0821302045	G 1/8	G 1/8	0.4 ... 6 bar	0.14 kg
0821302046	G 1/4	G 1/4	0.1 ... 2 bar	0.12 kg
0821302031	G 1/4	G 1/4	0.15 ... 3 bar	0.12 kg
0821302047	G 1/4	G 1/4	0.4 ... 6 bar	0.12 kg
R412007723	G 1/4	G 1/4	0.4 ... 10 bar	0.12 kg

Nominal flow with secondary pressure 6.3 bar at Δp = 1 bar

Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .


Mounting with mounting bracket 1821331013
panel installation

Technical information

Material	
Housing	Die cast zinc

Dimensions

Dimensions

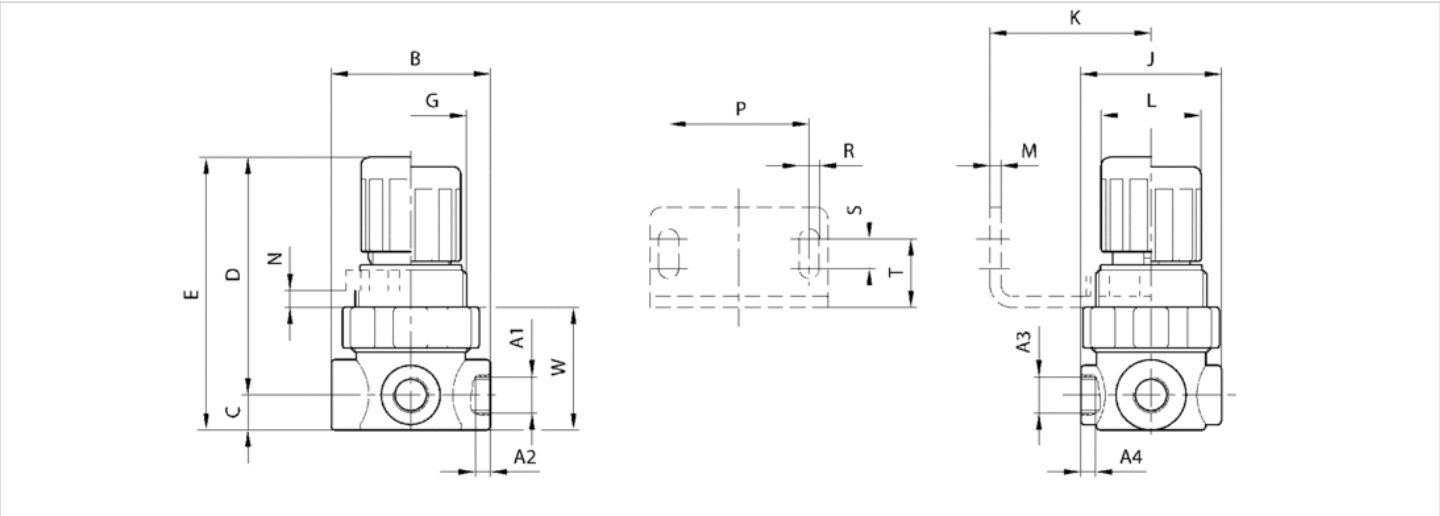


Dimensions

A1	A2	A3	A4	B	C	D	E	G	J	K	L	M	N	P	R	S	T	W
G1/8	8	G1/8	8	43	9.5	61	70.5	M30x1.5	38	40	27	3	5	38	5.4	8	18.5	33
G1/4	8	G1/8	8	43	9.5	61	70.5	M30x1.5	38	40	27	3	5	38	5.4	8	18.5	33

Circuit diagram

Application example

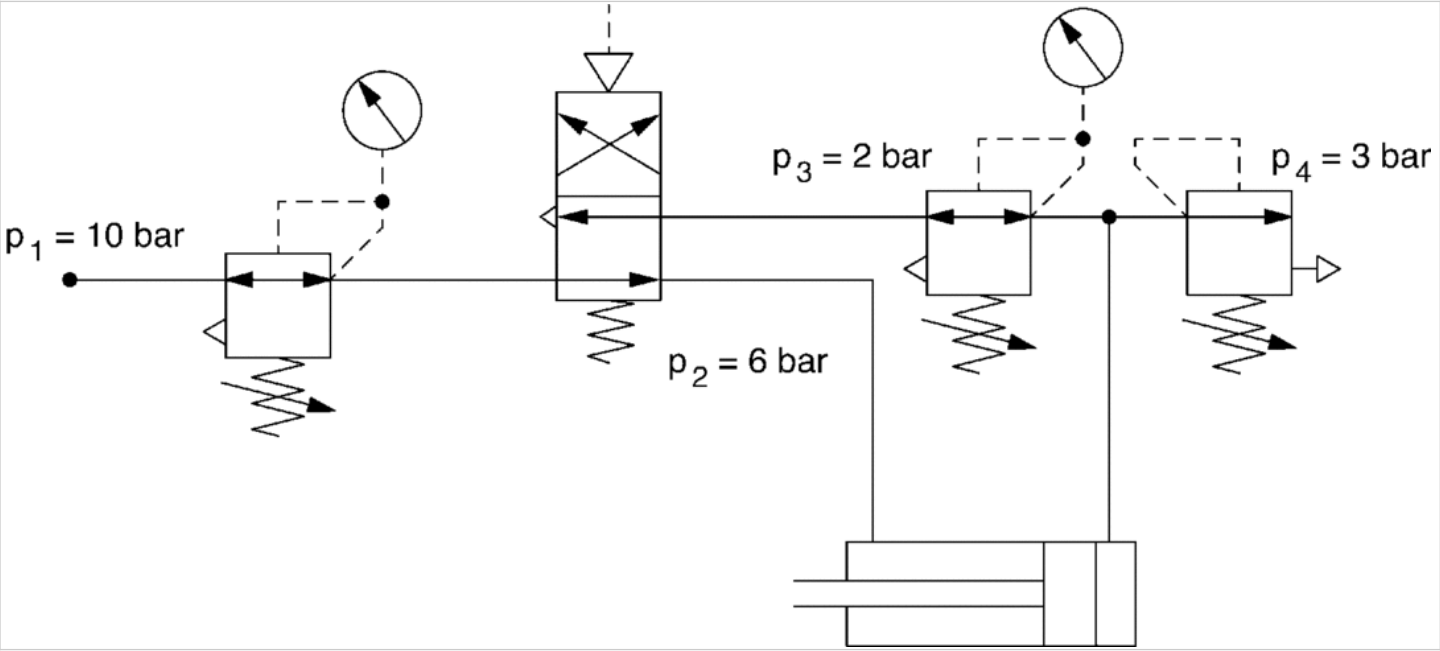


adjustable opening pressure

Oil separator, Series MU1

- G 1/2 G 3/4 G 1



Version	filter silencer
Parts	Oil separator
Mounting orientation	vertical
Working pressure min./max.	0 ... 10 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Weight	See table below

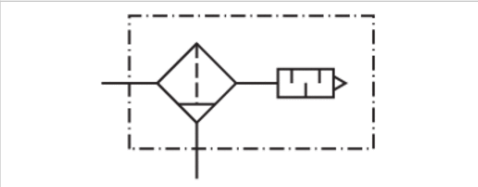

Technical data

Part No.	Port	Nominal flow Qn	Material Reservoir	Weight
0821303053	G 1/2	2500 l/min	Polyoxymethylene	0.735 kg
0821303055	G 3/4	3000 l/min	Polyoxymethylene	0.7 kg
0821303054	G 1	3500 l/min	Polyoxymethylene	1.25 kg

Nominal flow with secondary pressure 6.3 bar at Δp = 1 bar, Filter efficiency: 99.99%, Silencer >40 db(A), working pressure 5 bar , Qn= 2000 l/min , 1 m distance

Technical information


The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
Mounting with mounting bracket 1821336021
max. residual oil content at the outlet 0.01 mg/m³

Technical information

Material	
Housing	Aluminum
Filter end cap	Steel
Reservoir	Polyoxymethylene
Oil pan	Polyoxymethylene

Dimensions

Dimensions

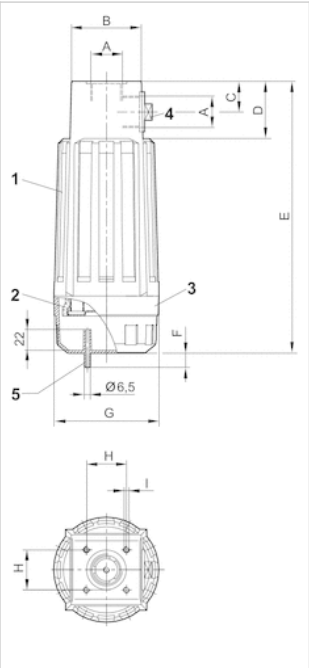


- 1) Housing
- 2) microfilter element
- 3) drip container
- 4) plugs
- 5) Tubing connection

Dimensions


A1	A	B	C	D	E	F	G	H	I
G 1/2	G 1/2	62	26	48	200	15	90	42	M6
G 3/4	G 3/4	62	26	48	200	15	90	42	M6
G 1	G 1	73	32	60	285	15	110	42	M6

Diagrams

Flow rate characteristic

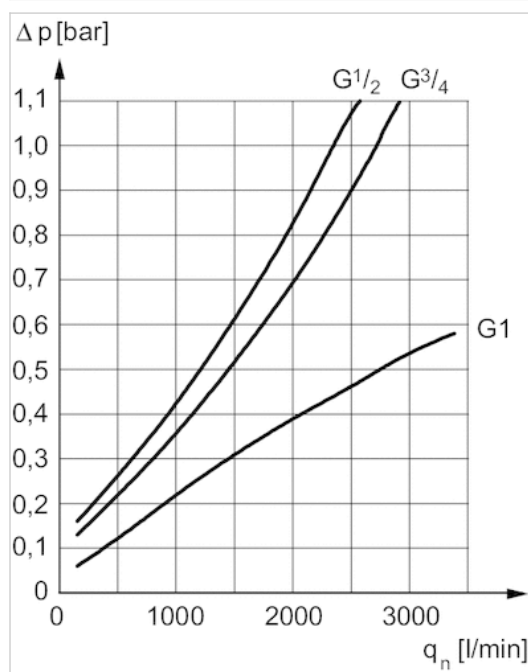


noise emission

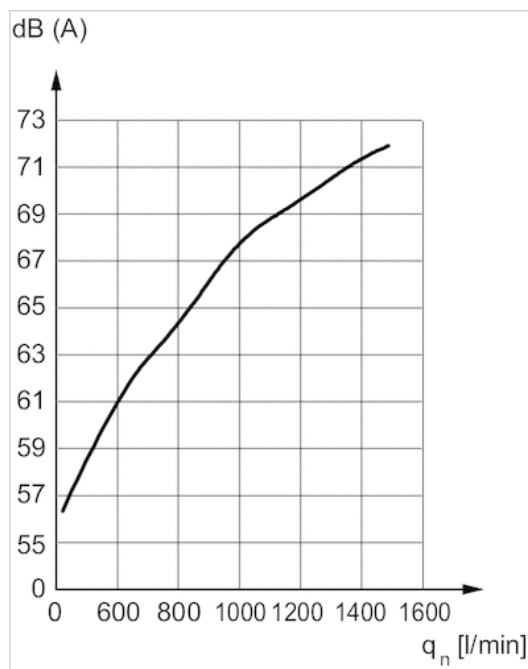

q_n = nominal flow

Condensate separator, Series MU1

- G 1/2
- Material Polycarbonate
- suitable for ATEX

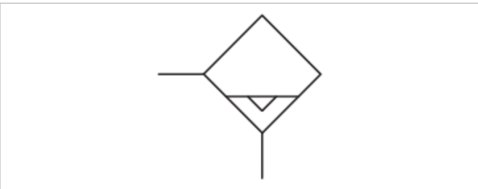

Parts	Condensate separator
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	2 ... 16 bar
Ambient temperature min./max.	0 ... 50 °C
Medium temperature min./max.	0 ... 50 °C
Medium	Compressed air Neutral gases
Filter reservoir volume	49 cm³
Weight	0.185 kg

Technical data

Part No.	Condensate drain	Protective guard	Fig.
R412010688	semi-automatic, open without pressure	Polyamide	Fig. 1
R412010689	fully automatic, open without pressure	Polyamide	Fig. 2
R412010690	fully automatic, closed without pressure	Polyamide	Fig. 2

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

To discharge condensate and oil from the compressed air network

Ideally installed at the lowest point of the compressed air network


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information


Material	
Reservoir	Polycarbonate
Protective guard	Polyamide
Seal	Nitrile butadiene rubber

Dimensions

Dimensions, Fig. 1

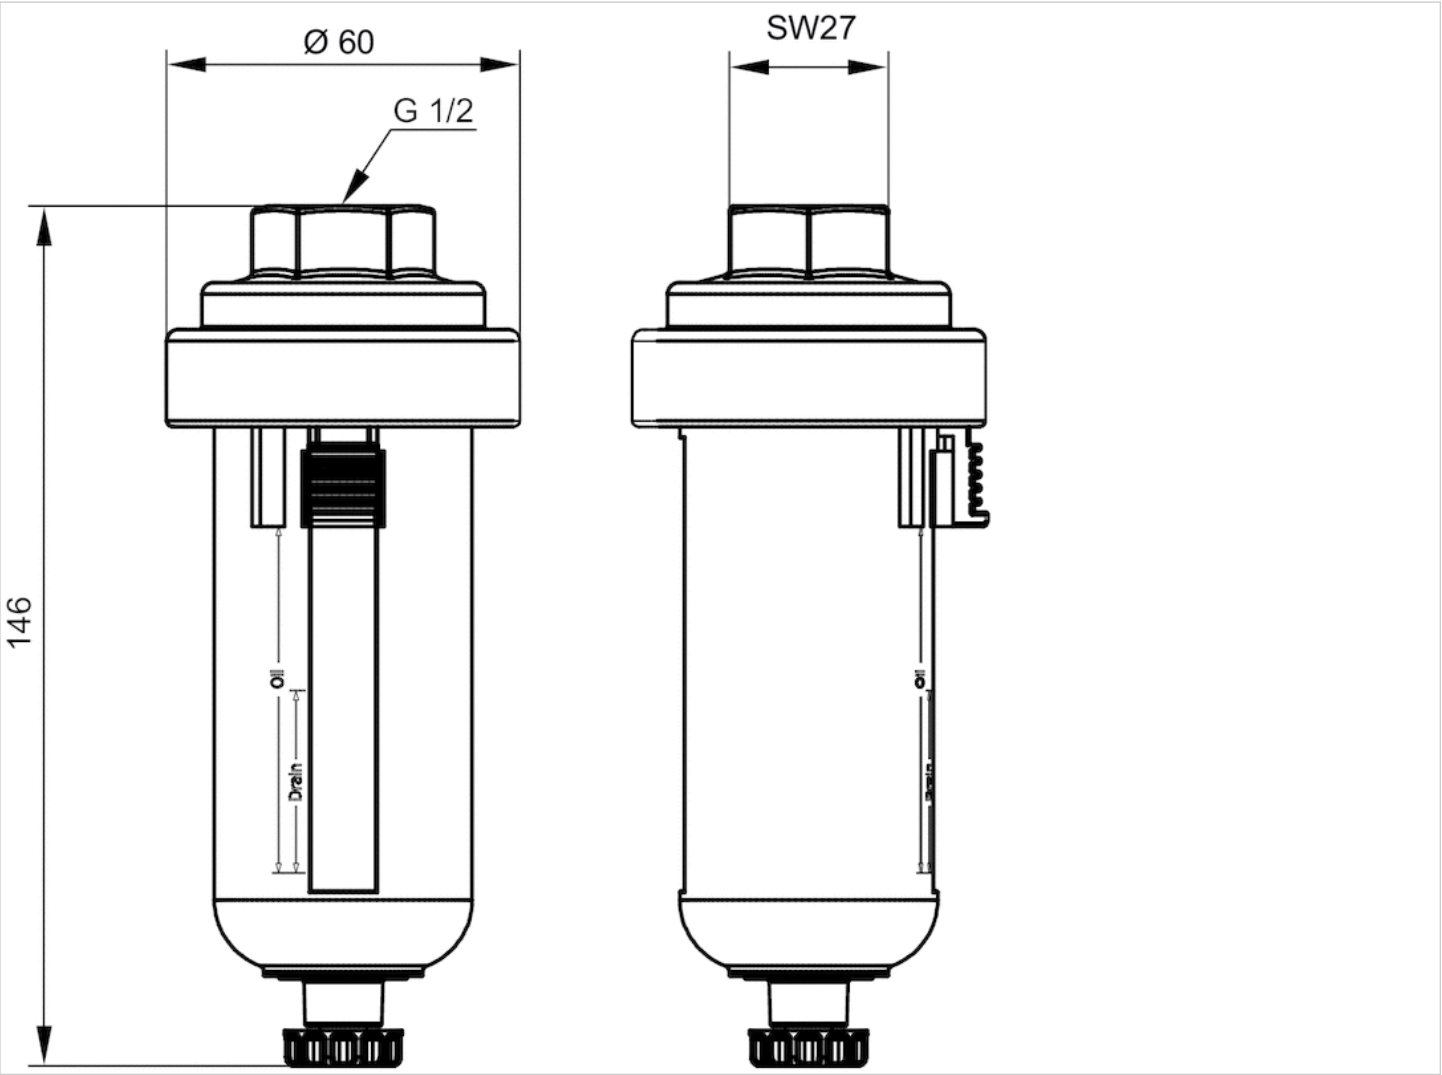

Dimensions, Fig. 2

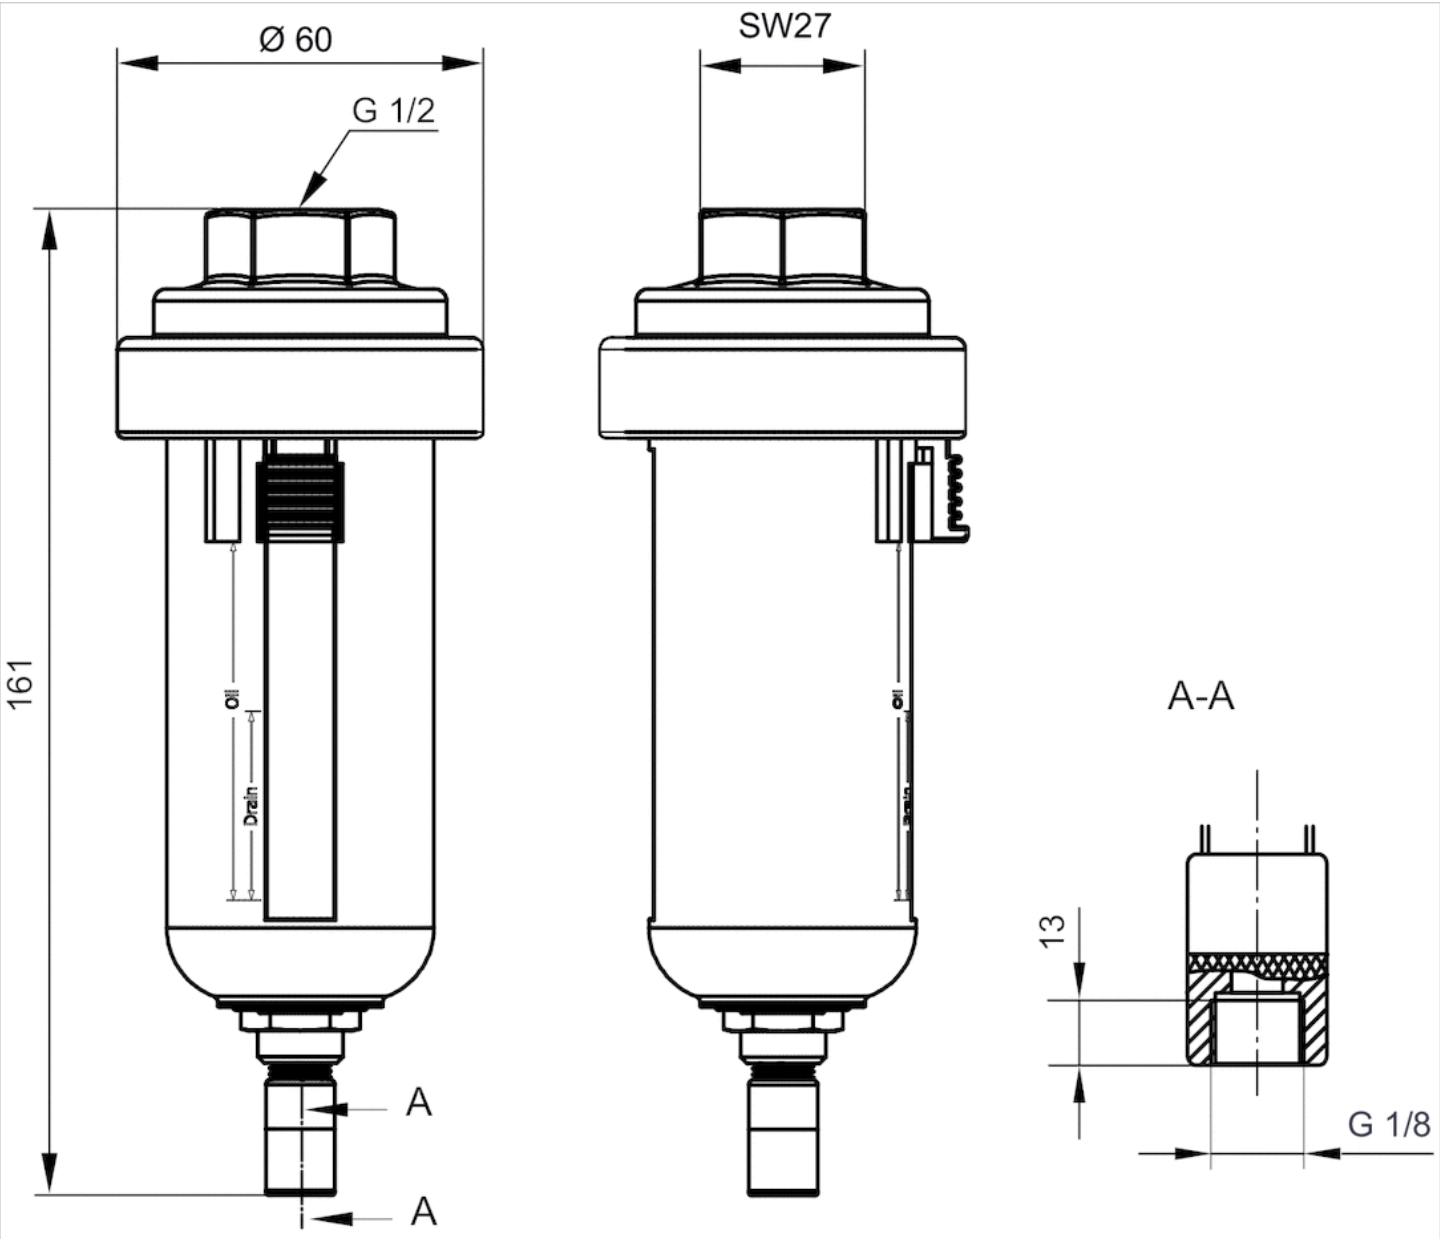

Reservoir

- Material metal Polycarbonate



Version

Certificates

Working pressure min./max.

Ambient temperature min./max.

Medium

Weight

Reservoir

suitable for ATEX

16 bar

-10 ... 50 °C

Compressed air

See table below

Technical data


Part No.	Reservoir	Filter reservoir volume	Weight
R412004881	metal	550 cm ³	0.33 kg
R412004882	Polycarbonate	1700 cm ³	0.24 kg

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Reservoir	metal Polycarbonate
Seal	Acrylonitrile butadiene rubber

Dimensions

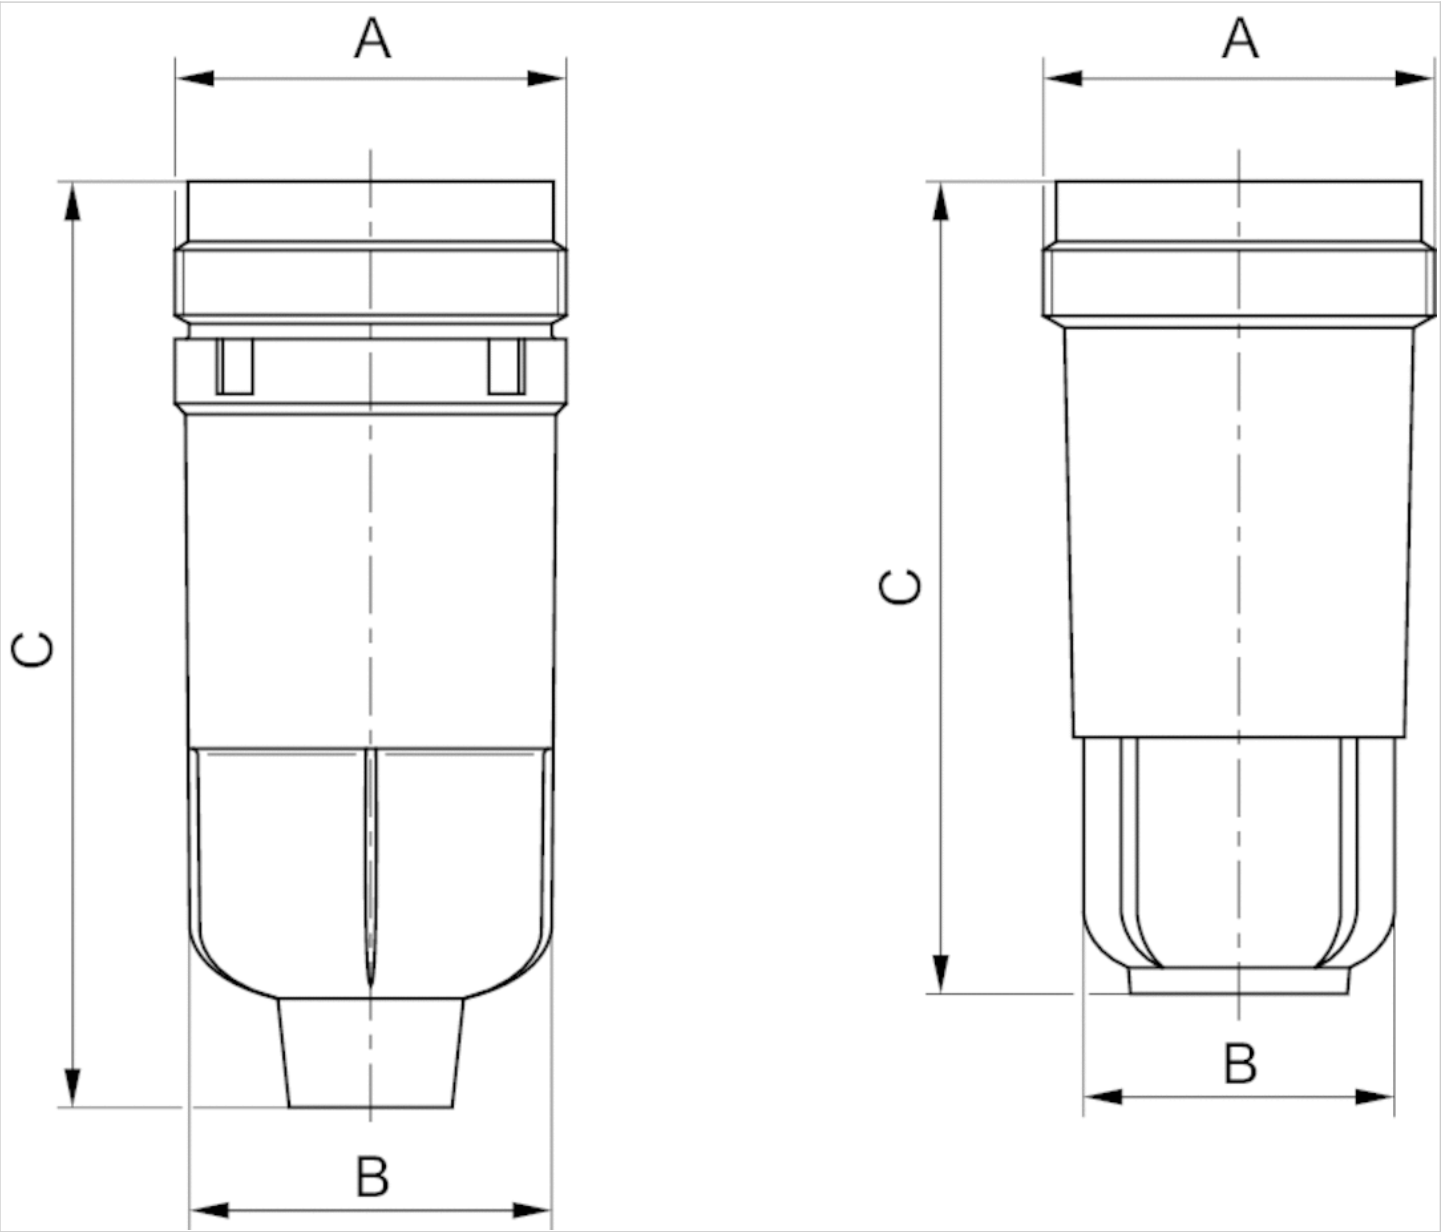

Dimensions

Part No.	A	B	C
R412004881	M36x1,5	34	85
R412004882	M36x1,5	33.5	71.5

Reservoir, Series MU1

- for MU1

- Material metal Polycarbonate



Version

Working pressure min./max.

Ambient temperature min./max.

Medium

Filter reservoir volume

Weight

Reservoir

See table below

-10 ... 50 °C

Compressed air

300 cm³

See table below

Technical data

Part No.	Condensate drain	Reservoir	ATEX
R412004876	Manual	metal	-
R412004877	semi-automatic, open without pressure	Polycarbonate	suitable for ATEX
R412004875	fully automatic, open without pressure	metal	suitable for ATEX

Part No.	Weight	Fig.	
R412004876	0.34 kg	Fig. 1	-
R412004877	0.25 kg	Fig. 2	1)
R412004875	0.395 kg	Fig. 3	1)

1) Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Reservoir	metal Polycarbonate
Seal	Acrylonitrile butadiene rubber

Dimensions

Fig. 1

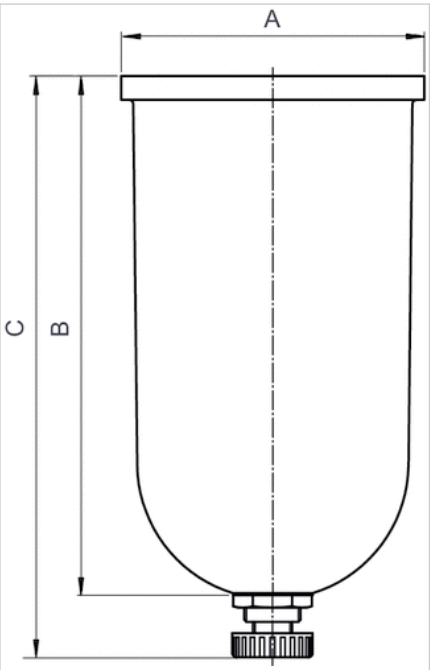


Fig. 2


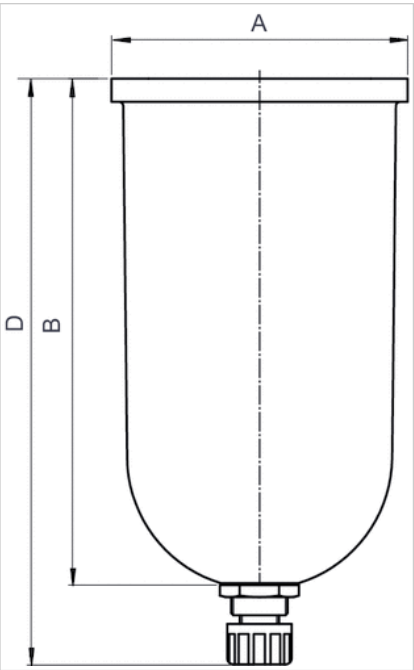


Fig. 3

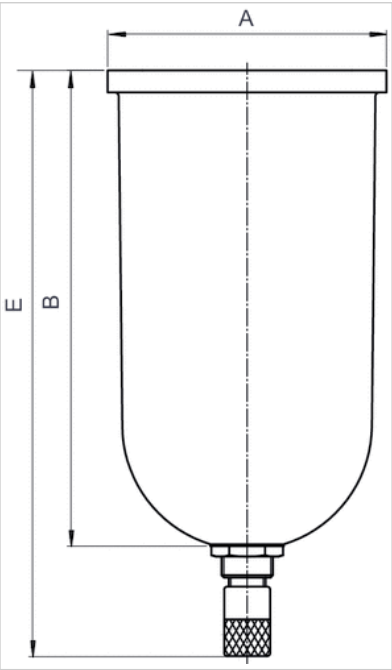

Dimensions

Part No.	ØA	B	C	D
R412004876	76	130	-	149.7
R412004877	76	130	145.3	-
R412004875	76	130	-	160

Protective guard for filter and lubricator



Weight

0.14 kg

Technical data


Part No.	Type
R412004879	MU1

Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Material	Steel black oxidized

Dimensions

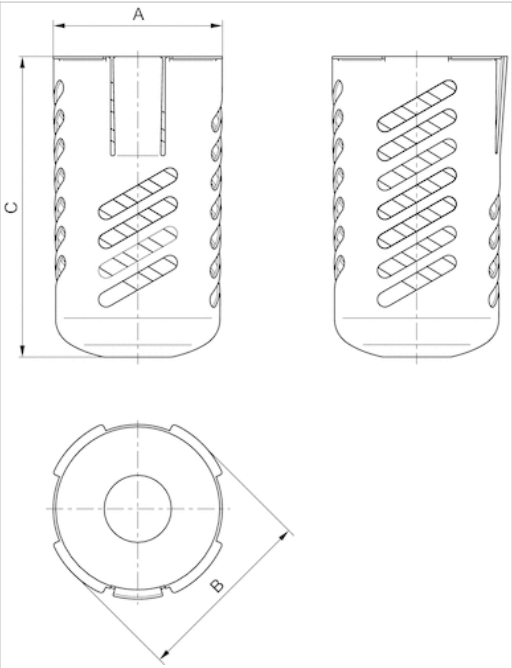

Dimensions

Part No.	Type	A	B	C
R412004879	MU1	38	43	86

Mounting bracket, Series MU1-MBR-...-W02

- for MU1
- oil separator G 1/2, G 3/4, G 1



Weight

0.104 kg

Technical data


Part No.	for
1821336021	MU1

Technical information

Material	
Housing	Steel, galvanized

Dimensions

Dimensions

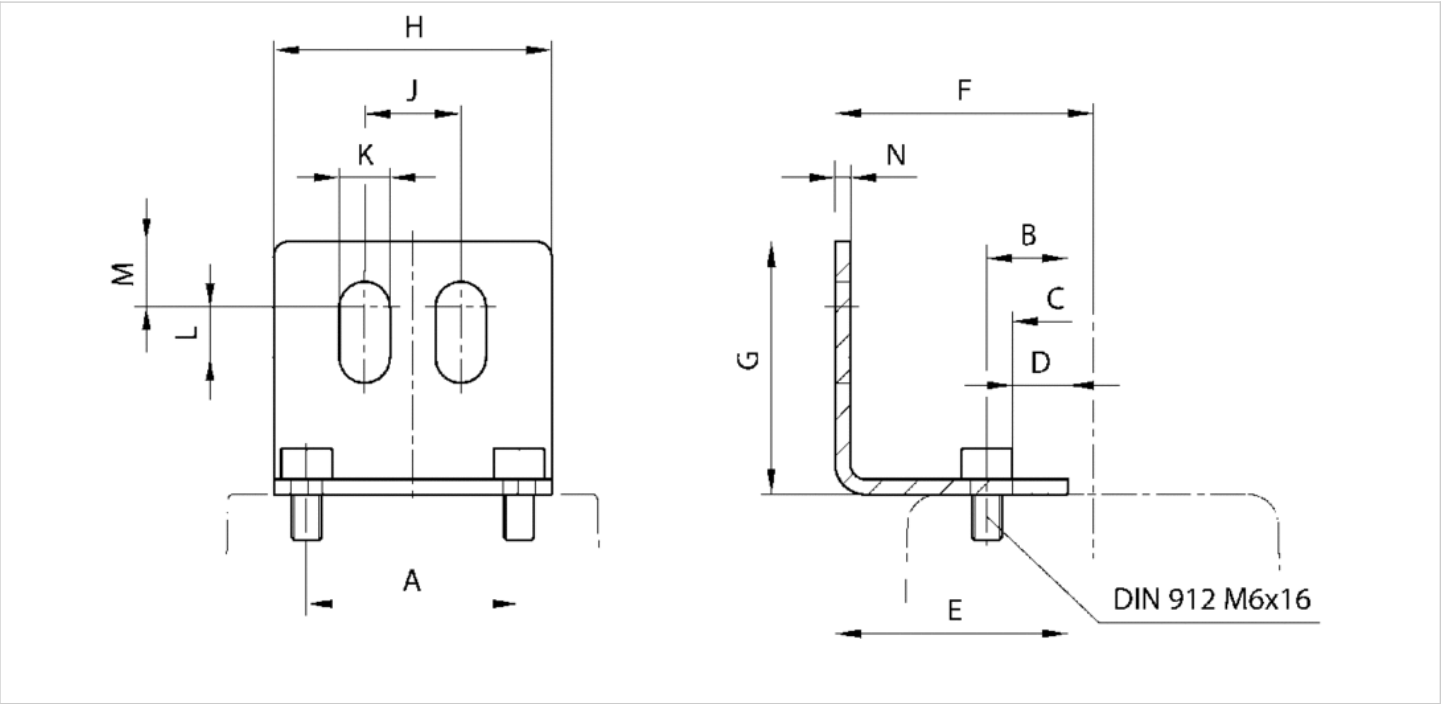

Dimensions

Part No.	A	B	C	D	E	F	G	H	J	K	L	M	N
1821336021	42	21	25	11	46	51	50	55	19	10	10	13	3

Mounting bracket, Series MU1/PR1-MBR-...-W02

- for MU1, PR1



Ambient temperature min./max. -40 ... 60 °C

Technical data


Part No.	for
R412004872	MU1, PR1

Technical information

Material	
Housing	Steel, galvanized

Dimensions

Dimensions

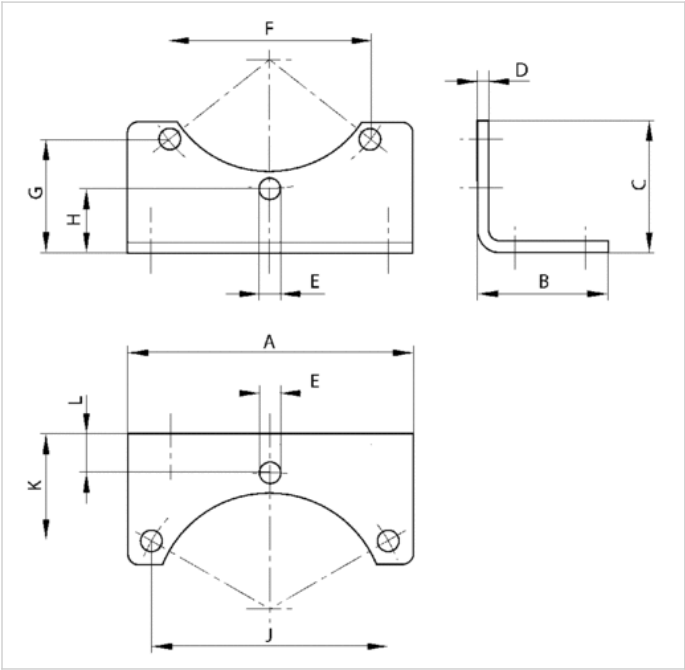

Dimensions

Part No.		A	B	C	D	E	F	G	H	J	K	L
R412004872	G1	76	35	35	3	5.5	53.6	30.1	17	63.2	28.8	10.5

Mounting bracket, Series MU1-MBR-...-W02

- for MU1



Ambient temperature min./max. -40 ... 60 °C

Technical data


Part No.	for
R412004874	MU1

Technical information

Material	
Housing	Steel, galvanized

Dimensions

Dimensions

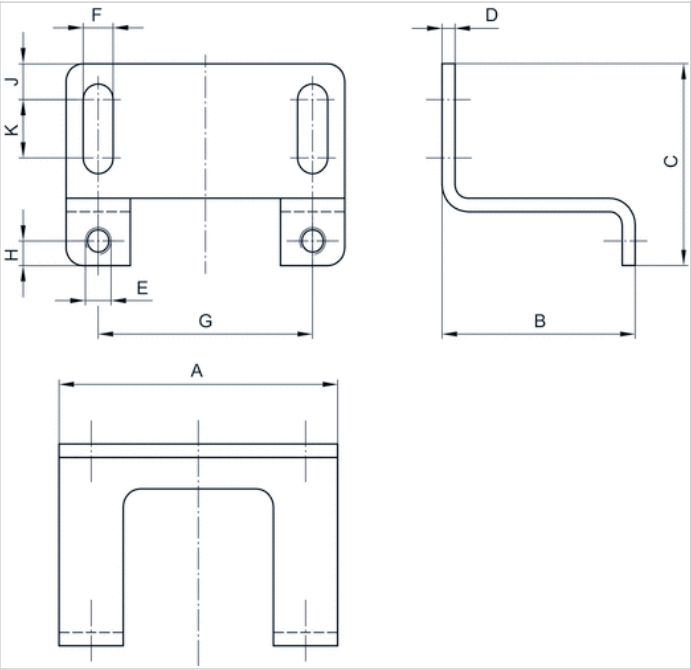

Dimensions

Part No.	A	B	C	D	E	F	G	H	J	K
R412004874	65	45	45	3	M6	7	50	5.5	8	13

Mounting bracket, Series MU1-MBR-...-W02

- for MU1



Ambient temperature min./max. -40 ... 60 °C

Technical data


Part No.	for
R412004873	MU1

Technical information

Material	
Housing	Steel, galvanized

Dimensions

Dimensions

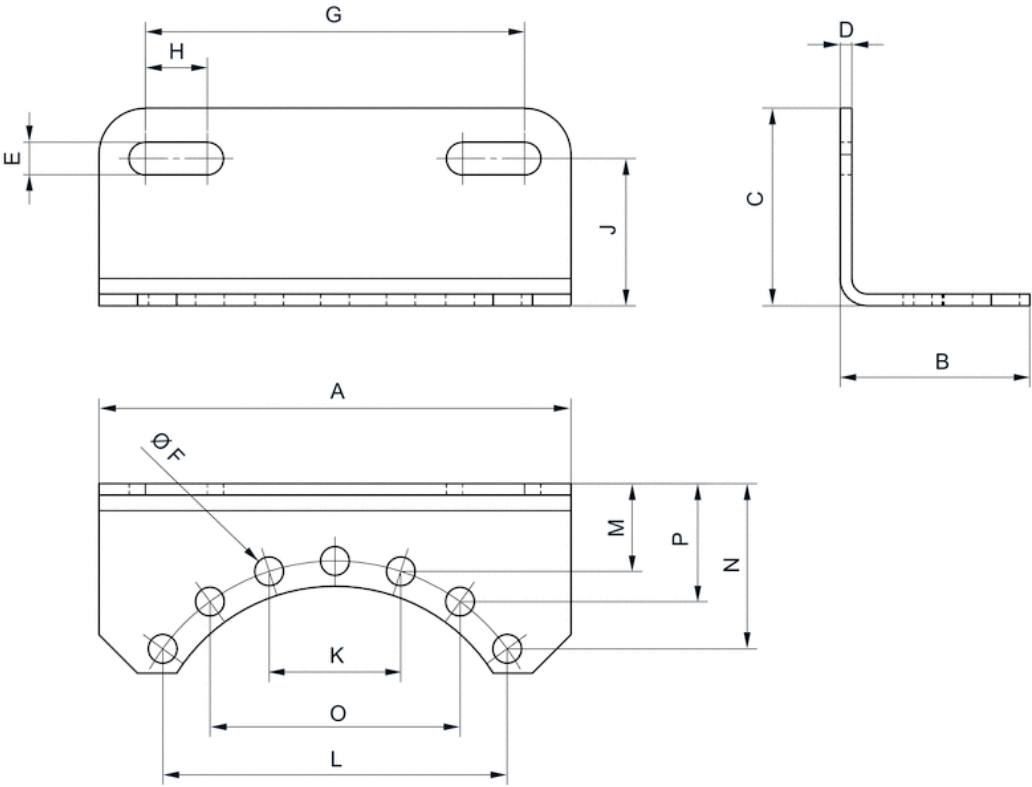

Dimensions

Part No.	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
R412004873	124	49	51	3	8,4	7,4	98	16	38	34	89	22,9	42,7	64,7	30,5

Mounting bracket, Series NL1/NL2-MBR-...-W02



Ambient temperature min./max.

-40 ... 60 °C

Weight

0.065 kg

Technical data


Part No.
1821331013

Technical information

Material	
Housing	Steel, galvanized

Dimensions

Dimensions

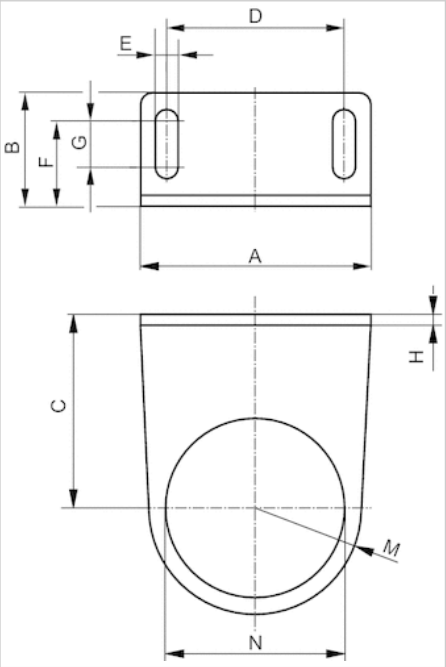

Dimensions

Part No.	A	B	C	D	E	F	G	H	M	N
1821331013	48	27	43.5	38	5.4	18.5	8	3	20	30.5

plugs




Technical data

Part No.	Type	Suitable for	Delivery unit
R412010124	plugs	Pressure gauge connection: G 1/4	10 piece

Technical information

Material	
Housing	Polyamide
Seal	Acrylonitrile butadiene rubber

Dimensions

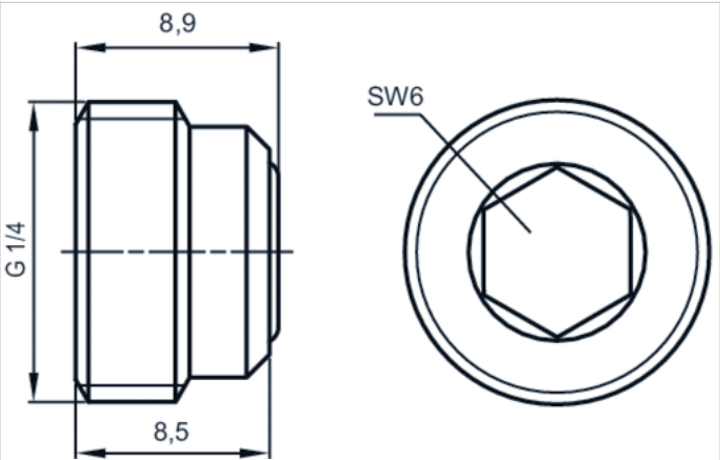

Panel nut, Series AS-MBR-...-W06

- M30x1,5
- for AS1, NL1, NL2, MU1, PR2



Weight

0.013 kg

The delivered product may vary from that in the illustration.

Technical data

Part No.	Port	for	Scope of delivery
1829234070	M30x1,5	AS1, NL1, NL2, MU1, PR2	5 piece


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Brass

Dimensions

Dimensions in mm

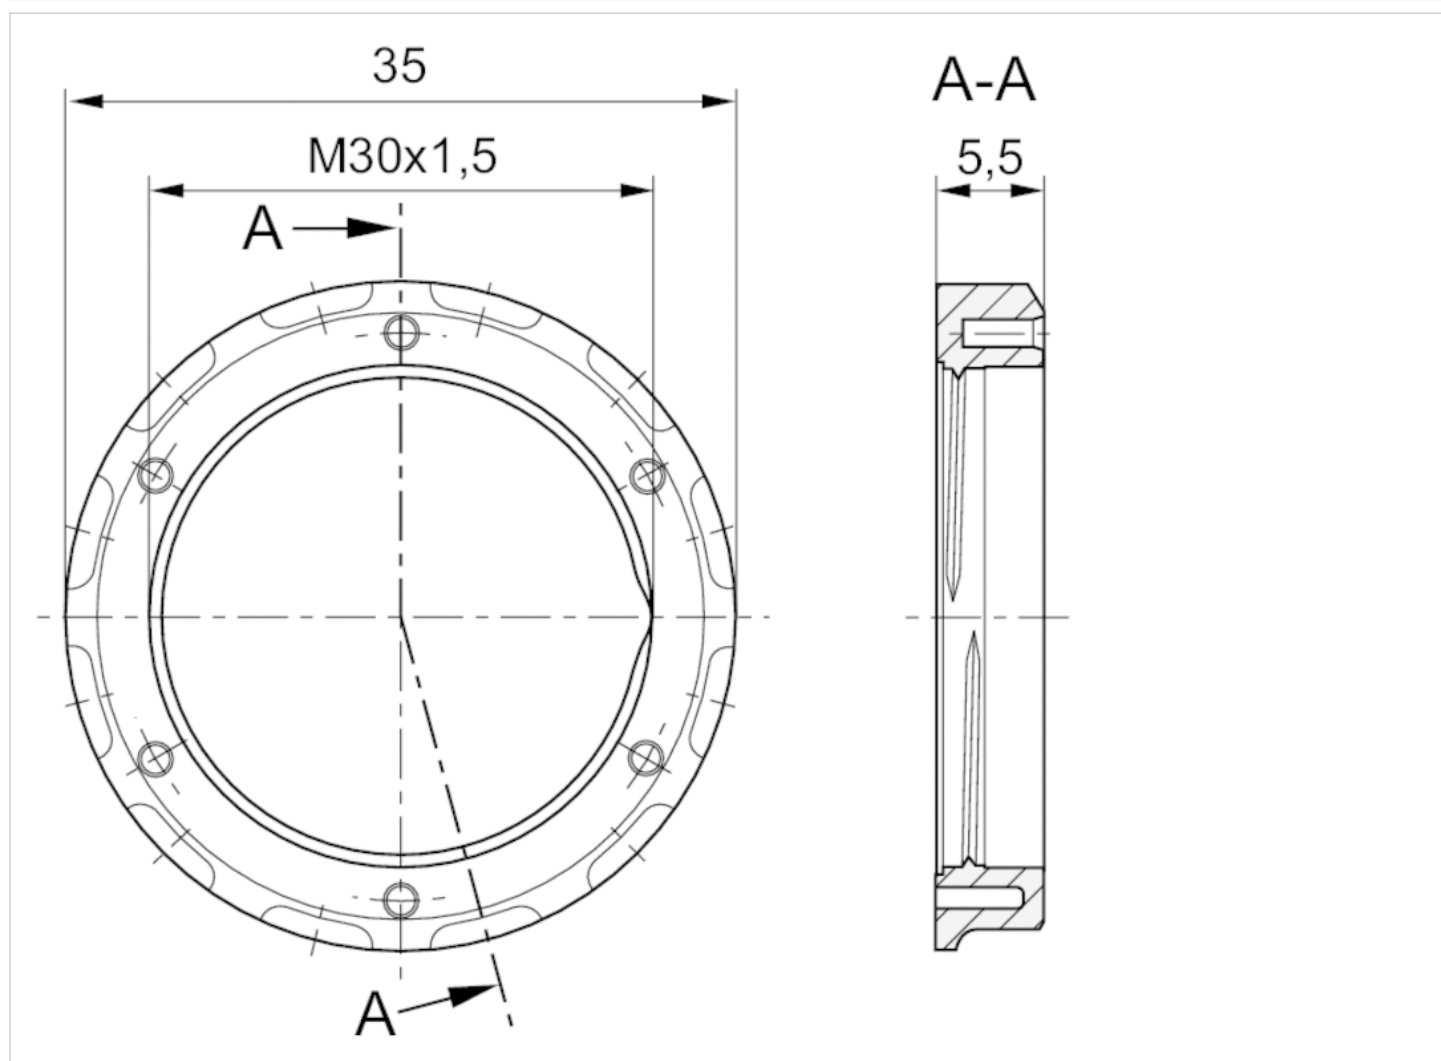


Pressure gauge, Series PG1-SAS

- Back port
- Background color Black
- Scale color White, Grey
- Viewing window Polystyrene
- Units bar
- Units psi



Version	Bourdon tube pressure gauge
Standardization	EN 837-1
Class	2,5
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Main scale unit (outside)	bar
Main scale color (outside)	White
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Grey
Background color	Black
Pointer color	White
Weight	See table below

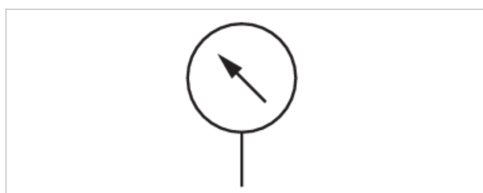

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412003853	G 1/8	40 mm	0 bar ... 1.2	0 bar ... 1.6	0 ... 1.6 bar	0.05
R412003854	G 1/8	40 mm	0 bar ... 2	0 bar ... 2.5	0 ... 2.5 bar	0.1
R412003855	G 1/8	40 mm	0 bar ... 3.2	0 bar ... 4	0 ... 4 bar	0.1
R412003856	G 1/8	40 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0.2
R412003857	G 1/8	40 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0.2
R412003858	G 1/8	40 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0.5
R412004407	G 1/4	40 mm	0 bar ... 1.2	0 bar ... 1.6	0 ... 1.6 bar	0.05
R412004408	G 1/4	40 mm	0 bar ... 2	0 bar ... 2.5	0 ... 2.5 bar	0.1
R412004409	G 1/4	40 mm	0 bar ... 3.2	0 bar ... 4	0 ... 4 bar	0.1
R412004410	G 1/4	40 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0.2
R412004411	G 1/4	40 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0.2
R412004412	G 1/4	40 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0.5
R412004413	G 1/4	50 mm	0 bar ... 1.2	0 bar ... 1.6	0 ... 1.6 bar	0.05
R412004414	G 1/4	50 mm	0 bar ... 2	0 bar ... 2.5	0 ... 2.5 bar	0.1
R412004415	G 1/4	50 mm	0 bar ... 3.2	0 bar ... 4	0 ... 4 bar	0.1
R412004416	G 1/4	50 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0.2
R412004417	G 1/4	50 mm	0 bar ... 8 bar	0 bar ... 10 bar	0 ... 10 bar	0.2
R412004418	G 1/4	50 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0.5
R412007898	G 1/4	50 mm	0 bar ... 20	0 bar ... 25	0 ... 25 bar	1

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412004419	G 1/4	63 mm	0 bar ... 1.2	0 bar ... 1.6	0 ... 1.6 bar	0.05
R412004420	G 1/4	63 mm	0 bar ... 2	0 bar ... 2.5	0 ... 2.5 bar	0.1
R412004421	G 1/4	63 mm	0 bar ... 3.2	0 bar ... 4	0 ... 4 bar	0.1
R412004422	G 1/4	63 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0.2
R412004423	G 1/4	63 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0.2
R412004424	G 1/4	63 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0.5

Part No.	Weight	Fig.	
R412003853	0.08 kg	Fig. 4	-
R412003854	0.08 kg	Fig. 4	-
R412003855	0.08 kg	Fig. 4	-
R412003856	0.08 kg	Fig. 4	-
R412003857	0.08 kg	Fig. 4	-
R412003858	0.08 kg	Fig. 4	-
R412004407	0.08 kg	Fig. 1	-
R412004408	0.08 kg	Fig. 1	-
R412004409	0.08 kg	Fig. 1	-
R412004410	0.08 kg	Fig. 1	-
R412004411	0.08 kg	Fig. 1	-
R412004412	0.08 kg	Fig. 1	-
R412004413	0.09 kg	Fig. 2	-
R412004414	0.09 kg	Fig. 2	-
R412004415	0.09 kg	Fig. 2	-
R412004416	0.09 kg	Fig. 2	-
R412004417	0.09 kg	Fig. 2	1)
R412004418	0.09 kg	Fig. 2	1)
R412007898	0.09 kg	Fig. 2	-
R412004419	0.1 kg	Fig. 3	-
R412004420	0.1 kg	Fig. 3	-
R412004421	0.1 kg	Fig. 3	-
R412004422	0.1 kg	Fig. 3	-
R412004423	0.1 kg	Fig. 3	-
R412004424	0.1 kg	Fig. 3	-


1) Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass
Viewing window	Polystyrene
Seal	Polytetrafluorethylene


Dimensions

Dimensions in mm, Fig. 1

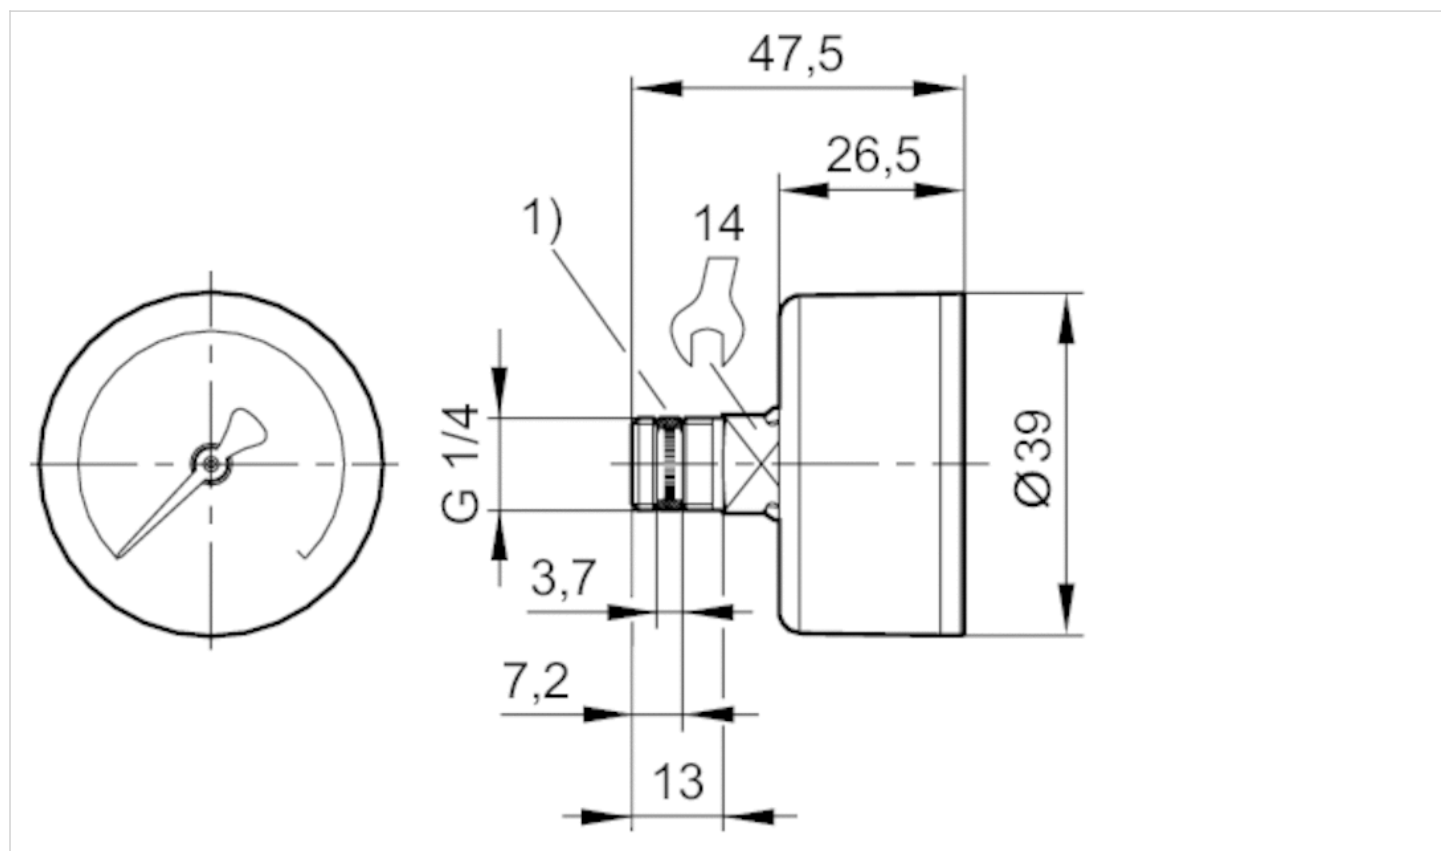


1) Gasket thread

Dimensions in mm, Fig. 2

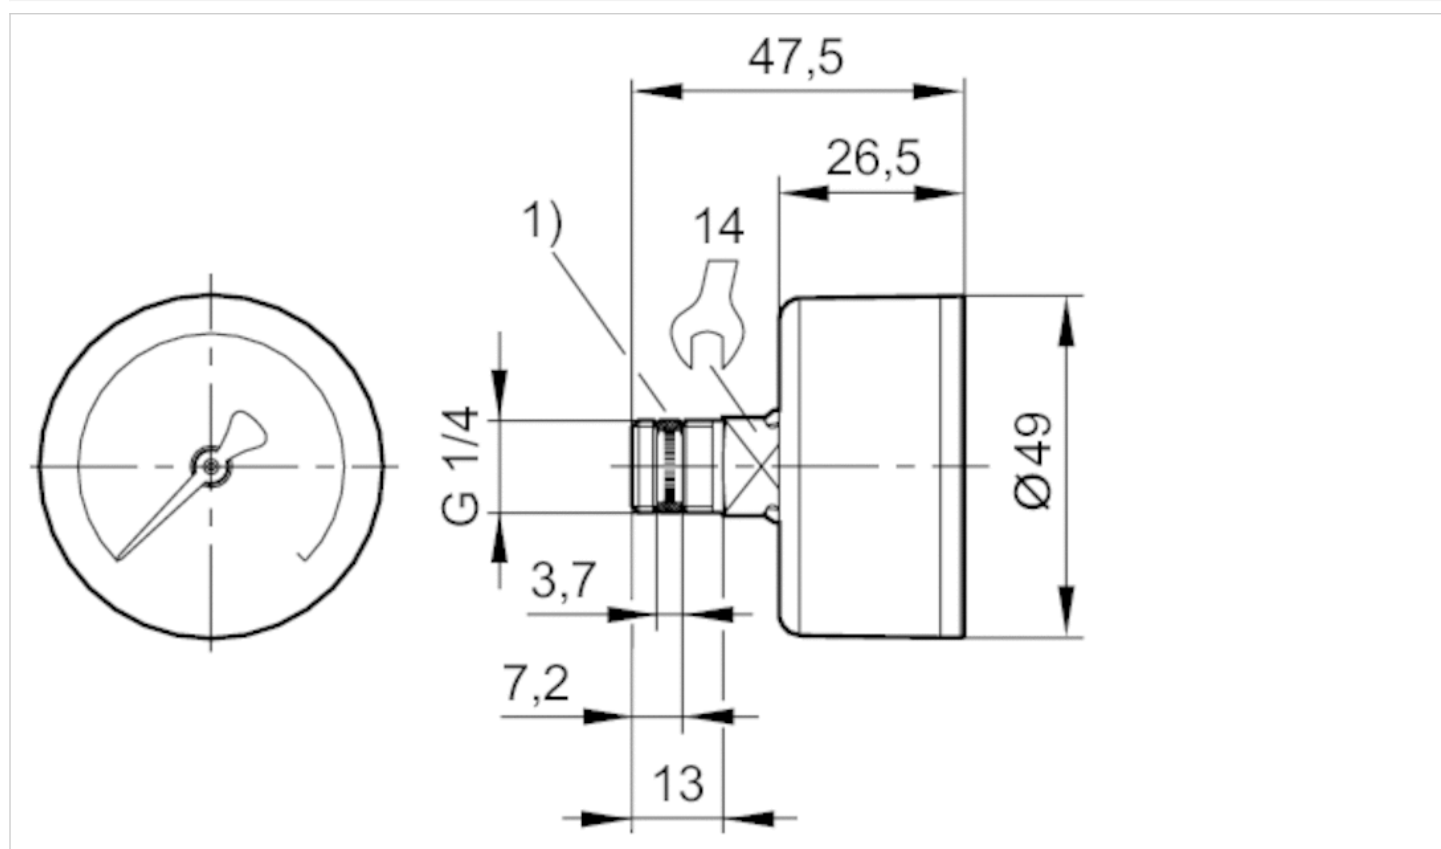

1) Gasket thread


Dimensions in mm, Fig. 3

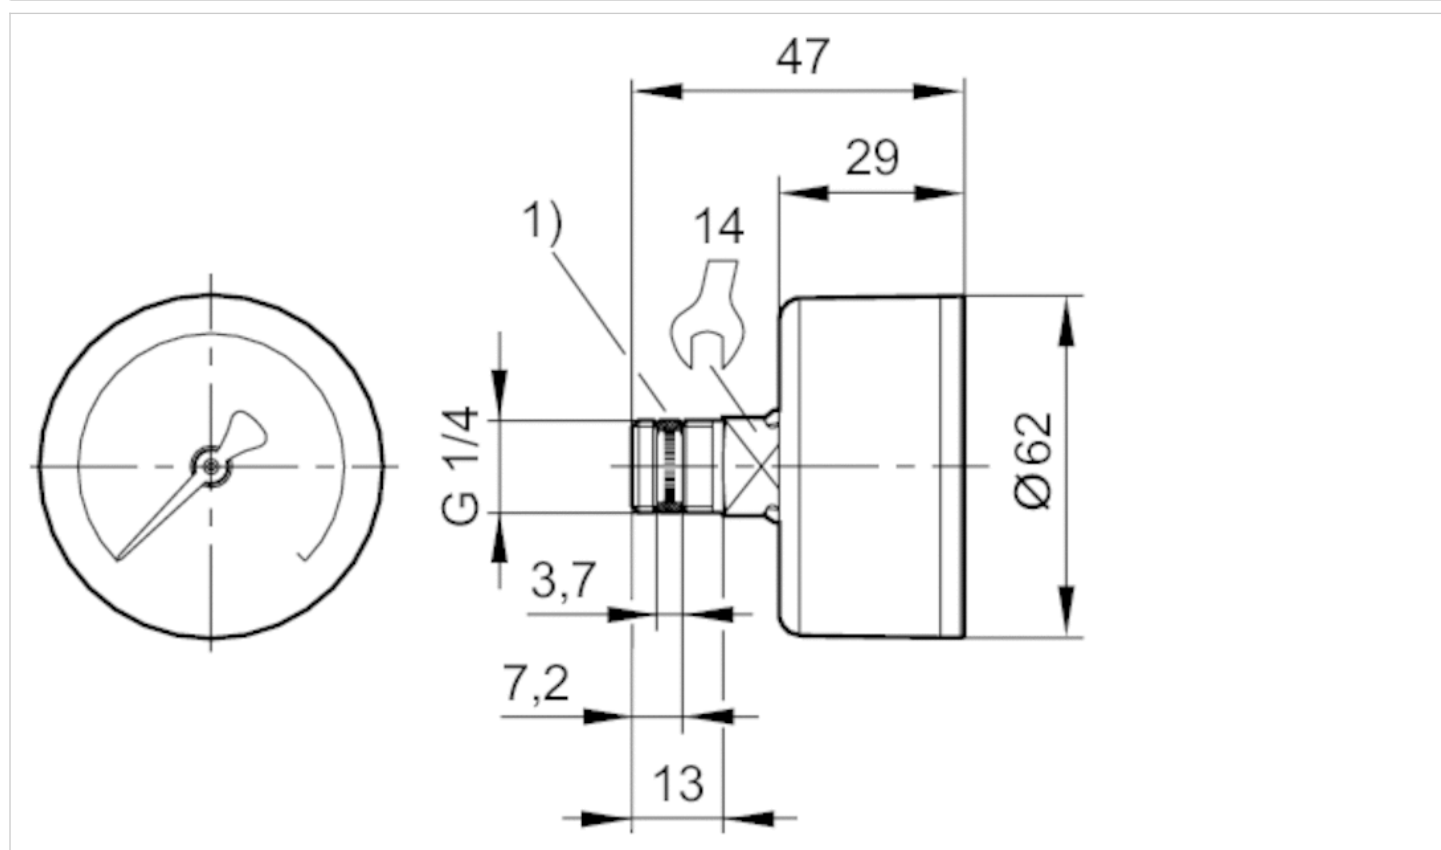

1) Gasket thread

Pressure gauge, Series PG1-SAS-ADJ

- Back port
- with adjustable work area display
- Background color Black
- Scale color White, Grey
- Viewing window Polystyrene
- Units bar
- Units psi

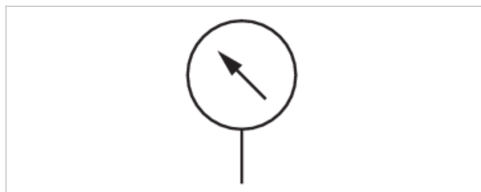

Version	Bourdon tube pressure gauge
Version	with adjustable work area display
Standardization	EN 837-1
Class	2,5
Ambient temperature min./max.	-40 ... 60 °C
Medium	Compressed air
Work area	adjustable work area display
Work Area Display, Color	Red Green
Main scale unit (outside)	bar
Main scale color (outside)	White
Secondary scale unit (inside)	psi
Secondary scale color (inside)	Grey
Background color	Black
Pointer color	White
Weight	0.1 kg

Technical data

Part No.	Compressed air connection	Nominal diameter	Range of application	Display range	Operating pressure	Scale value
R412007867	G 1/4	50 mm	0 bar ... 1.2	0 bar ... 1.6	0 ... 1.6 bar	0.05
R412007868	G 1/4	50 mm	0 bar ... 2	0 bar ... 2.5	0 ... 2.5 bar	0.1
R412007869	G 1/4	50 mm	0 bar ... 3.2	0 bar ... 4	0 ... 4 bar	0.1
R412007870	G 1/4	50 mm	0 bar ... 4	0 bar ... 6	0 ... 6 bar	0.2
R412007871	G 1/4	50 mm	0 bar ... 8	0 bar ... 10	0 ... 10 bar	0.2
R412007872	G 1/4	50 mm	0 bar ... 12	0 bar ... 16	0 ... 16 bar	0.5

Technical information

To set the operating range, the cover (inspection glass) must be removed. To do this, carefully lift the inspection glass by inserting a pointed or flat object in the slot provided for this purpose on the housing circumference.

Technical information

Material	
Housing	Acrylonitrile butadiene styrene
Thread	Brass

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2017 Emerson Electric Co. All rights reserved.
2019-03



CONSIDER IT SOLVED™